


MBE15_-10-V

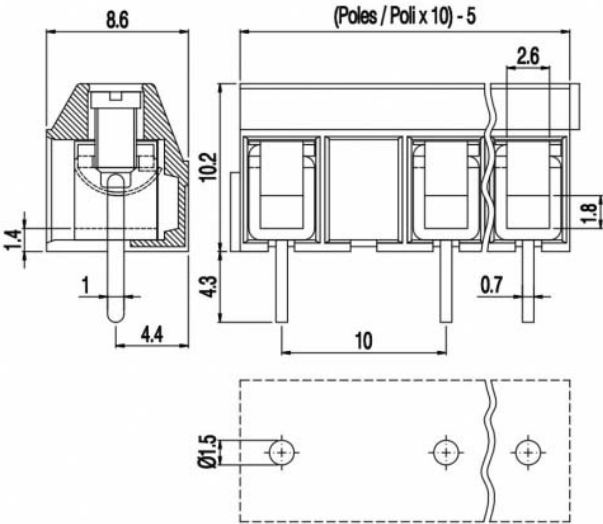

GENERAL INFORMATION

pitch	10 mm
Height	10.2 mm
Depth	8.6 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.6 x 2 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	750 V
impulse voltage	3 kV

MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷4 in.lbs

APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	17.5 A	17.5 A	20 A factory / 15 A field
Voltage	750 V	750 V	600 V
Wire section	1.5 mm²	1.5 mm²	14 AWG
Torque	0.4 Nm	0.4 Nm	3.6 Nm
FILE	EP151	40019705	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy

Terminal		Tin-plated copper alloy					
COLOURS							
Standard		On request					
GN		GY	BK	BL	RD	YL	OG
POLES		NAME			3D FILE		
1	MBE151-10-V			File available			
2	MBE152-10-V			File available			
3	MBE153-10-V			File available			
4	MBE154-10-V			File available			
5	MBE155-10-V			File available			
6	MBE156-10-V			File available			