
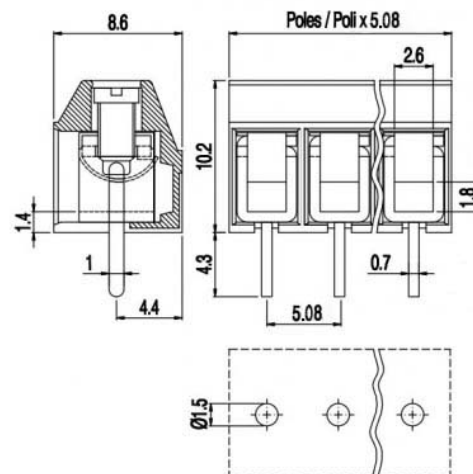


MBE15_-10-V-L

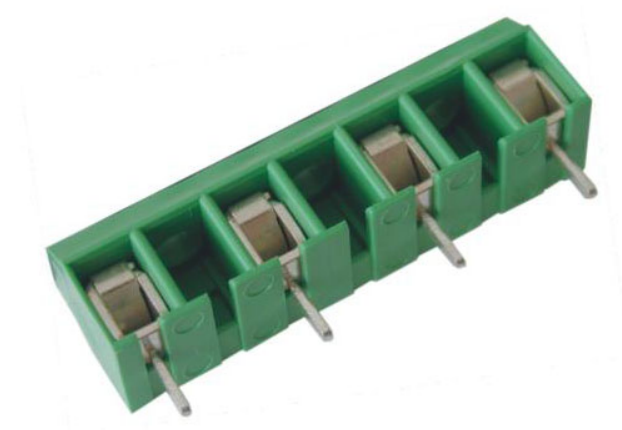

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

GENERAL INFORMATION

pitch	10 mm
Height	10.2 mm
Depth	8.6 mm
Dimensional class	Bassa
Wire section	1.5 mm ² / 16 AWG
Clamp opening size	2.6 x 2 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	17.5 A
Voltage	750 V
impulse voltage	3 kV

MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷4 in.lbs

APPROVALS DATA



EN 60998-1



EN 60998-1



UL 1059

Current	17.5 A	17.5 A	20 A factory / 15 A field
Voltage	750 V	750 V	600 V
Wire section	1.5 mm ²	1.5 mm ²	14 AWG
Torque	0.4 Nm	0.4 Nm	3.6 Nm
FILE	EP151	40019705	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

COLOURS



On request

POLES	NAME	3D FILE
2	MBE152-10-V-L	File not available for this product
3	MBE153-10-V-L	File not available for this product
4	MBE154-10-V-L	File not available for this product
5	MBE155-10-V-L	File not available for this product
6	MBE156-10-V-L	File not available for this product