
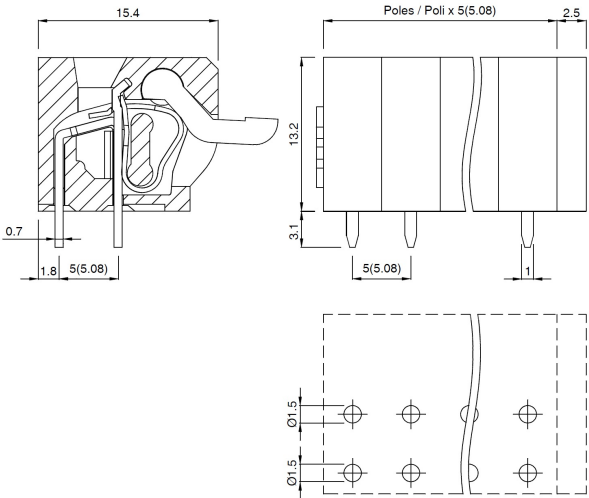


MG1__-5,08-V-P

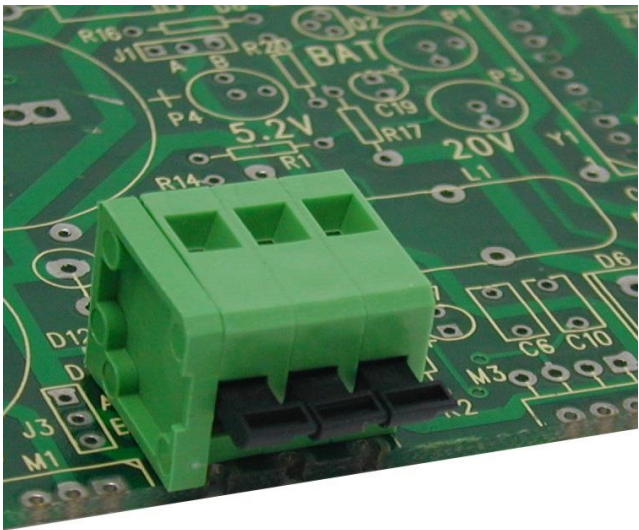

GENERAL INFORMATION

pitch	5,08 mm
Height	13.2 mm
Depth	15.4 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.45 x 2.45 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
impulse voltage	2 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



			UL 1059
Current	-	-	17 A factory / 17 A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

COLOURS

			On request					
Standard								
GN			GY	BK	BL	RD	YL	OG
POLES	NAME		3D FILE					
01	MG101-5,08-V-P		File not available for this product					
02	MG102-5,08-V-P		File not available for this product					
03	MG103-5,08-V-P		File not available for this product					
04	MG104-5,08-V-P		File not available for this product					
05	MG105-5,08-V-P		File not available for this product					
06	MG106-5,08-V-P		File not available for this product					
07	MG107-5,08-V-P		File not available for this product					
08	MG108-5,08-V-P		File not available for this product					
09	MG109-5,08-V-P		File not available for this product					
10	MG110-5,08-V-P		File not available for this product					
11	MG111-5,08-V-P		File not available for this product					
12	MG112-5,08-V-P		File not available for this product					
13	MG113-5,08-V-P		File not available for this product					
14	MG114-5,08-V-P		File not available for this product					
15	MG115-5,08-V-P		File not available for this product					
16	MG116-5,08-V-P		File not available for this product					
17	MG117-5,08-V-P		File not available for this product					
18	MG118-5,08-V-P		File not available for this product					
19	MG119-5,08-V-P		File not available for this product					
20	MG120-5,08-V-P		File not available for this product					
21	MG121-5,08-V-P		File not available for this product					
22	MG122-5,08-V-P		File not available for this product					
23	MG123-5,08-V-P		File not available for this product					