
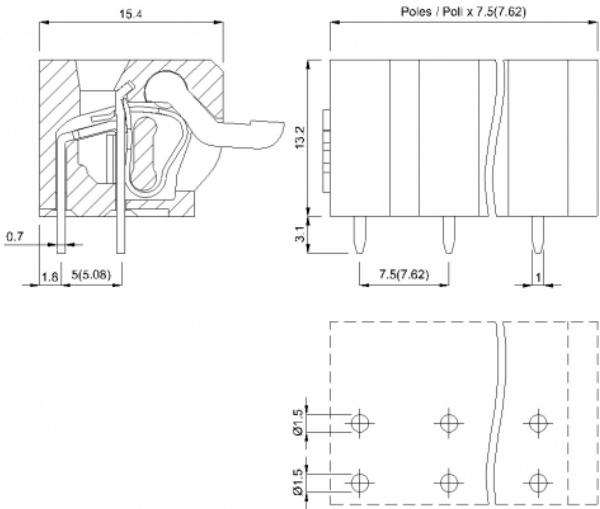


MG1__-7,62-V-P

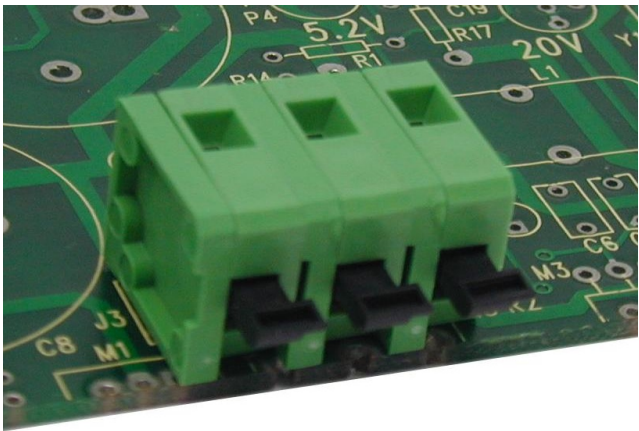

GENERAL INFORMATION

pitch	7,62 mm
Height	14.3 mm
Depth	16.75 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.45 x 2.45 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
impulse voltage	2 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



			UL 1059
Current	-	-	17 A factory / 17 A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Spring	Spring steel
Terminal	Tin-plated copper alloy

COLOURS

Standard

On request

GN GY BK BL RD YL OG		
POLES	NAME	3D FILE
02	MG102-7,62-V-P	File not available for this product
03	MG103-7,62-V-P	File not available for this product
04	MG104-7,62-V-P	File not available for this product
05	MG105-7,62-V-P	File not available for this product
06	MG106-7,62-V-P	File not available for this product
07	MG107-7,62-V-P	File not available for this product
08	MG108-7,62-V-P	File not available for this product
09	MG109-7,62-V-P	File not available for this product
10	MG110-7,62-V-P	File not available for this product
11	MG111-7,62-V-P	File not available for this product
12	MG112-7,62-V-P	File not available for this product
13	MG113-7,62-V-P	File not available for this product
14	MG114-7,62-V-P	File not available for this product
15	MG115-7,62-V-P	File not available for this product
16	MG116-7,62-V-P	File not available for this product
17	MG117-7,62-V-P	File not available for this product
18	MG118-7,62-V-P	File not available for this product
19	MG119-7,62-V-P	File not available for this product
20	MG120-7,62-V-P	File not available for this product
21	MG121-7,62-V-P	File not available for this product
22	MG122-7,62-V-P	File not available for this product
23	MG123-7,62-V-P	File not available for this product
24	MG124-7,62-V-P	File not available for this product