
## MG1D\_\_-5





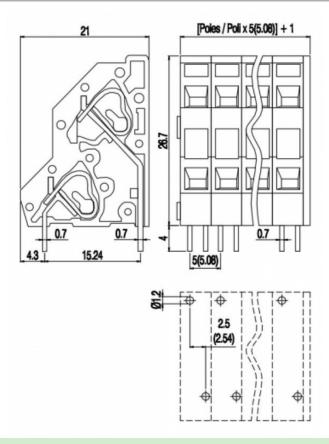

## **GENERAL INFORMATION**

pitch5 mmHeight26.7 mmDepth21 mmDimensional classBassaWire section2.5 mm² / 24 AWGClamp opening size-Wire strippingmax 9 mm

Operating temperature -40 ÷ +105 °C

## **ELECTRICAL CHARACTERISTICS**

Current24 AVoltage250 Vimpulse voltage2 kV

## **MECHANICAL CHARACTERISTICS**

Screw Recommended torque -

**APPROVALS DATA** 







UL 1059

 Current
 17 A factory / 17 A field

 Voltage
 300 V

Wire section - 12 AWG

Torque - - - -

**FILE** - E178356

**MATERIALS** 

Housing PA - UL 94 V0

Screw

Spring Spring steel Spring steel

**Terminal** Tin-plated copper alloy

**COLOURS** 

Standard On request



POLES	NAME	3D FILE
01	MG1D01-5	File not available for this product
02	MG1D02-5	File not available for this product
03	MG1D03-5	File not available for this product
04	MG1D04-5	File not available for this product
05	MG1D05-5	File not available for this product
06	MG1D06-5	File not available for this product
07	MG1D07-5	File not available for this product
08	MG1D08-5	File not available for this product
09	MG1D09-5	File not available for this product
10	MG1D10-5	File not available for this product
11	MG1D11-5	File not available for this product
12	MG1D12-5	File not available for this product
13	MG1D13-5	File not available for this product
14	MG1D14-5	File not available for this product
15	MG1D15-5	File not available for this product
16	MG1D16-5	File not available for this product
17	MG1D17-5	File not available for this product
18	MG1D18-5	File not available for this product
19	MG1D19-5	File not available for this product
20	MG1D20-5	File not available for this product
21	MG1D21-5	File not available for this product
22	MG1D22-5	File not available for this product
23	MG1D23-5	File not available for this product