
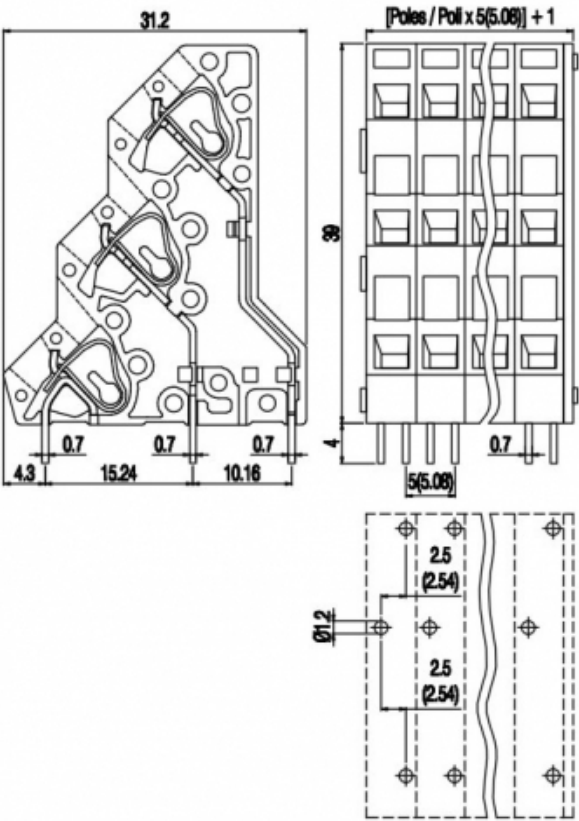


MG1T\_\_-5

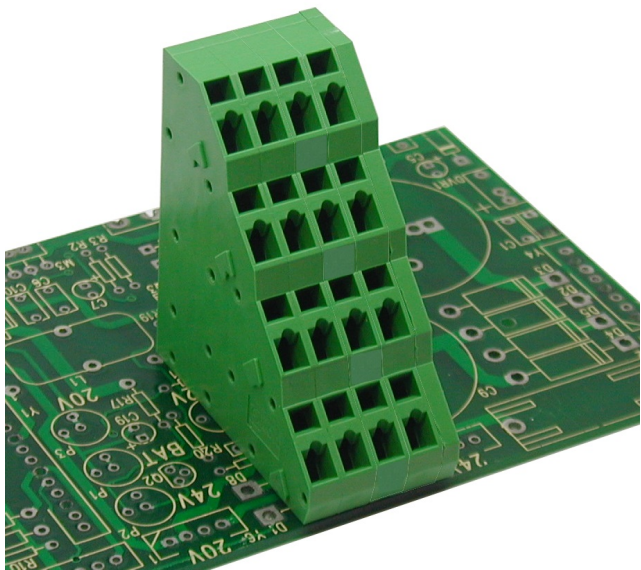

GENERAL INFORMATION

pitch	5 mm
Height	39 mm
Depth	31.2 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	-
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +105 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	250 V
impulse voltage	2 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current

-

-

UL 1059  
16 A factory / 16 A field

Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	-
FILE	-	-	E178356
MATERIALS			
Housing			PA - UL 94 V0
Screw			-
Spring			Spring steel
Terminal			Tin-plated copper alloy

COLOURS			
	Standard	On request	
			

POLES	NAME	3D FILE
01	MG1T01-5	File not available for this product
02	MG1T02-5	File not available for this product
03	MG1T03-5	File not available for this product
04	MG1T04-5	File not available for this product
05	MG1T05-5	File not available for this product
06	MG1T06-5	File not available for this product
07	MG1T07-5	File not available for this product
08	MG1T08-5	File not available for this product
09	MG1T09-5	File not available for this product
10	MG1T10-5	File not available for this product
11	MG1T11-5	File not available for this product
12	MG1T12-5	File not available for this product
13	MG1T13-5	File not available for this product
14	MG1T14-5	File not available for this product
15	MG1T15-5	File not available for this product
16	MG1T16-5	File not available for this product
17	MG1T17-5	File not available for this product
18	MG1T18-5	File not available for this product
19	MG1T19-5	File not available for this product
20	MG1T20-5	File not available for this product
21	MG1T21-5	File not available for this product
22	MG1T22-5	File not available for this product
23	MG1T23-5	File not available for this product