
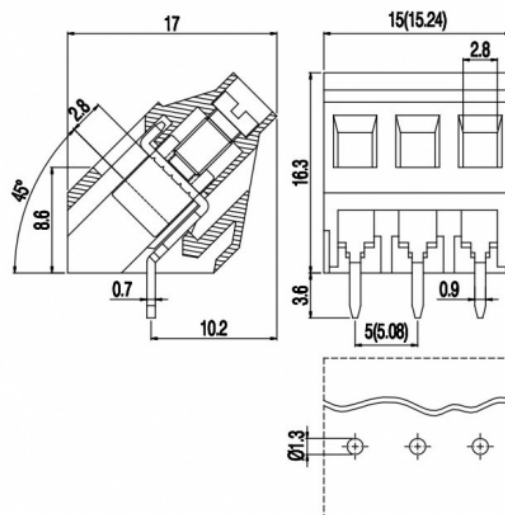


MI25_-5,08-IQ

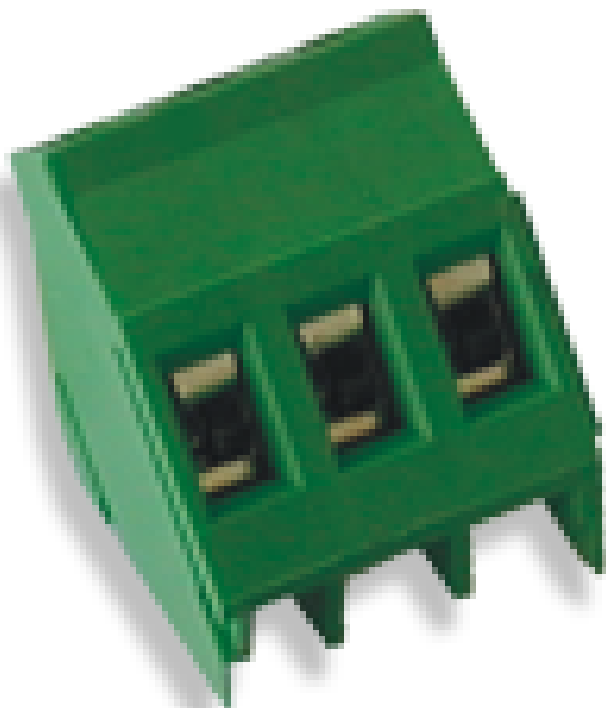

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorione.

GENERAL INFORMATION

pitch	5,08 mm
Height	16.3 mm
Depth	17 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 2.8 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	450 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA

EN 60998-1

Current	16 A
Voltage	450 V
Wire section	2.5 mm ²
Torque	0.5 Nm
FILE	EP149



EN 60998-1

16 A
450 V
2.5 mm ²
0.5 Nm
40023956



UL 1059

16 A factory / 15 A field
300 V
14 AWG
4.5 Nm
E178356

MATERIALS		
Housing		PA - UL 94 V0
Screw		Galvanized steel
Clamp		Nickel-plated copper alloy
Terminal		Tin-plated copper alloy
SCIP Number	adcc4757-2c9a-4bb9-872b-3ddf9966c3b0	

COLOURS		
Standard	On request	
GN	GY	BK
	BL	RD
	YL	OG

POLES	NAME	3D FILE
2	MI252-5,08-IQ	File available
3	MI253-5,08-IQ	File available