


# MIP25\_-10-IQ

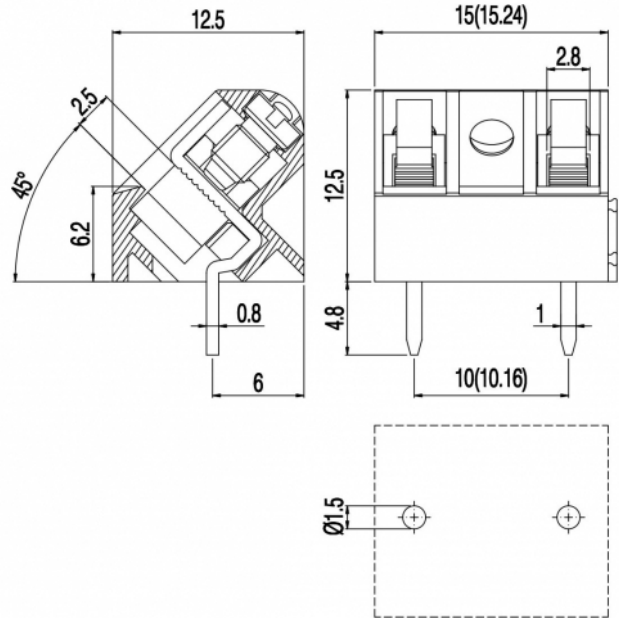

## GENERAL INFORMATION

pitch	10 mm
Height	12.5 mm
Depth	12.5 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 2.5 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	750 V
impulse voltage	3 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

## APPROVALS DATA



Current	-	-	<b>UL 1059</b> 24 A factory / 20 A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	4.5 Lb-in
FILE	-	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy

Terminal  
SCIP Number

Tin-plated copper alloy  
c6a908f2-e615-4316-8cfd-eebcad9d712

**COLOURS**

Standard



On request



**POLES**

**NAME**

**3D FILE**

1	MIP251-10-IQ	File not available for this product
2	MIP252-10-IQ	File not available for this product