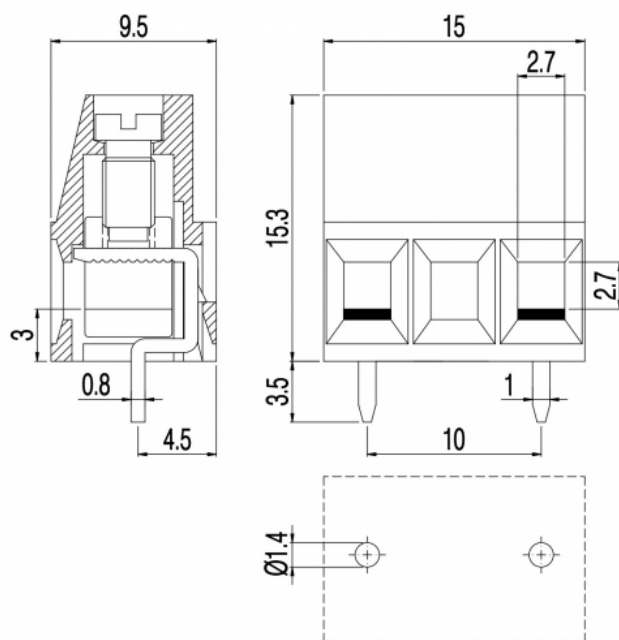
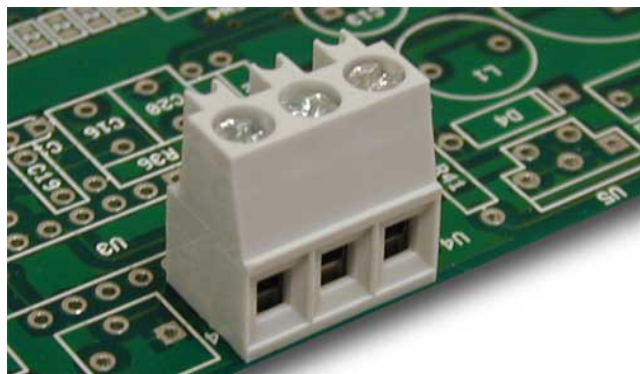


ML25_-10-V-L

**GENERAL INFORMATION**

pitch	10 mm
Height	15.3 mm
Depth	9.5 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.7 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	750 V
impulse voltage	3 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA

	EN 60998-1		UL 1059
Current	16 A	-	15 A factory / 15 A field
Voltage	750 V	-	300 V
Wire section	2.5 mm ²	-	14 AWG
Torque	0.5 Nm	-	4.5 Nm
FILE	CA02.01614	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel

Clamp

Terminal

SCIP Number

Nickel-plated copper alloy

Tin-plated copper alloy

e0e28fef-b46b-42ad-83c9-f668b6fb8d55

COLOURS

Standard

On request

GY

GN

BK

BL

RD

YL

OG

POLES	NAME	3D FILE
1	ML251-10-V-L	File not available for this product
2	ML252-10-V-L	File not available for this product