


MPT1010-D

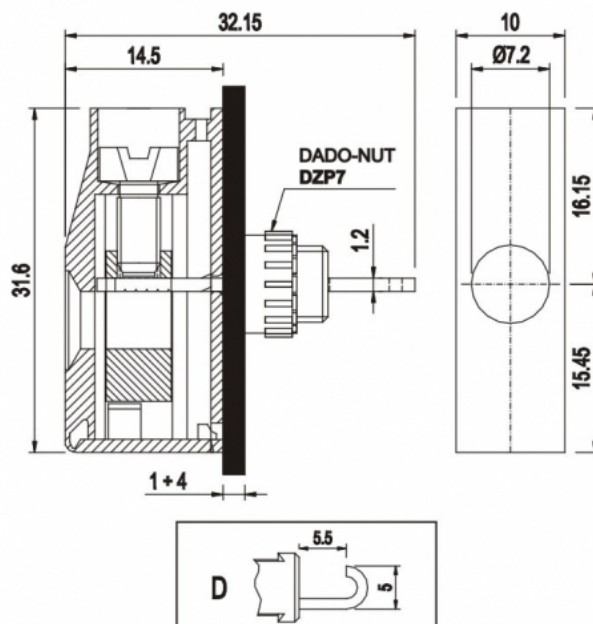

GENERAL INFORMATION

pitch	10 mm
Height	31.6 mm
Depth	14.5 mm
Dimensional class	n/a
Wire section	10 mm ² / 8 AWG
Clamp opening size	5.3 x 5.3 mm
Wire stripping	max 13.5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	57 A
Voltage	450 V

MECHANICAL CHARACTERISTICS

Screw	M4
Recommended torque	1.2÷1.32 Nm / 10.8÷11.9 in.lbs

APPROVALS DATA



EN 60998-1

Current	57 A
Voltage	450 V
Wire section	10 mm ²
Torque	1.2 Nm



EN 60998-1

Current	57 A
Voltage	450 V
Wire section	10 mm ²
Torque	1.2 Nm



UL 1059

Current	65 A factory / 65 A field
Voltage	600 V
Wire section	6 AWG
Torque	15.8 Nm

FILE	CA02.01616	40014733	E178356
MATERIALS			
Housing			PA - UL 94 V0
Screw			Galvanized steel
Clamp			Nickel-plated copper alloy
Terminal			Tin-plated copper alloy

COLOURS

Standard

GY

On request

GN

BK

BL

RD

YL

OG

YG