


MPT1010-P

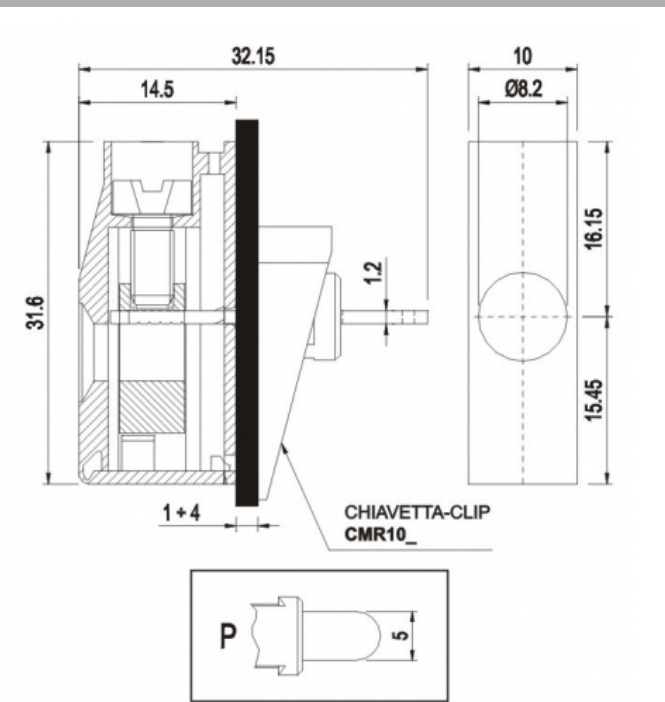

GENERAL INFORMATION

pitch	10 mm
Height	31.6 mm
Depth	14.5 mm
Dimensional class	n/a
Wire section	10 mm² / 8 AWG
Clamp opening size	-
Wire stripping	max 13.5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	57 A
Voltage	450 V
	-

MECHANICAL CHARACTERISTICS

Screw	M4
Recommended torque	1.2÷1.32 Nm / 10.8÷11.9 in.lbs

APPROVALS DATA



EN 60998-1
57 A
450 V
10 mm ²
1.2 Nm



EN 60998-1
57 A
450 V
10 mm ²
1.2 Nm



UL 1059	
65 A factory / 65 A field	
600 V	
6 AWG	
15.8 Nm	

FILE	CA02.01616	40014733	E178356
MATERIALS			
Housing			PA - UL 94 V0
Screw			Galvanized steel
Clamp			Nickel-plated copper alloy
Terminal			Tin-plated copper alloy
COLOURS			
Standard		On request	
GN		GY	BK
		BL	RD
		YL	OG