
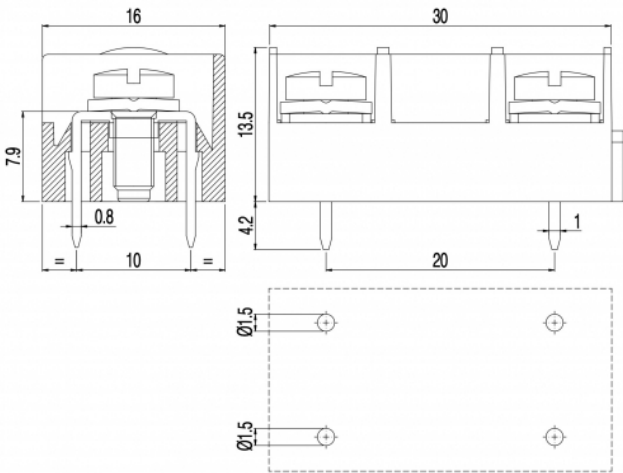


MTS21_-20-C

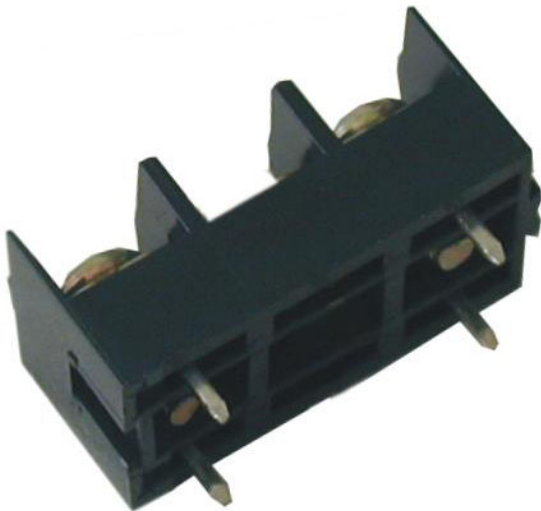

GENERAL INFORMATION

pitch	20 mm
Height	13.5 mm
Depth	16 mm
Dimensional class	Media
Wire section	2x2.5 mm² / 2x14 AWG
Clamp opening size	-
Wire stripping	max 11 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	25 A
Voltage	750 V
impulse voltage	3 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

APPROVALS DATA



			UL 1059
Current	-	-	25 A factory / 20 A field
Voltage	-	-	600 V
Wire section	-	-	12 AWG
Torque	-	-	7.2 Nm
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	-
Terminal	Tin-plated copper alloy

COLOURS

			On request					
Standard								
GN			GY	BK	BL	RD	YL	OG
POLES	NAME		3D FILE					
1	MTS211-20-C		File not available for this product					
2	MTS212-20-C		File not available for this product					