


MTS21_-10-C

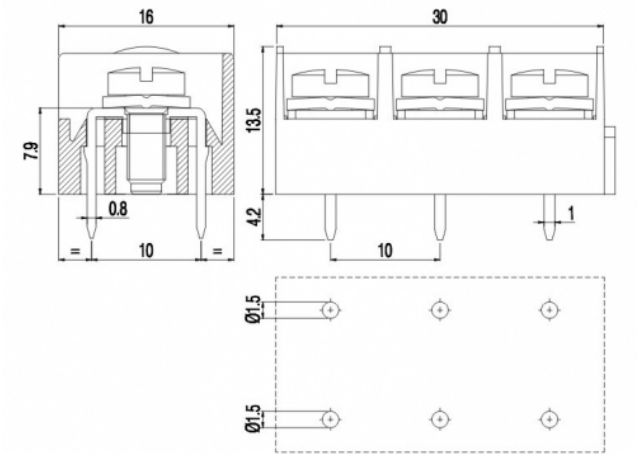

GENERAL INFORMATION

pitch	10 mm
Height	13.5 mm
Depth	16 mm
Dimensional class	Media
Wire section	2x2.5 mm² / 2x14 AWG
Clamp opening size	-
Wire stripping	max 11 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	25 A
Voltage	250 V
impulse voltage	2 kV

MECHANICAL CHARACTERISTICS

Screw	M3.5
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

APPROVALS DATA



			UL 1059
Current	-	-	25 A factory / 20 A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	7.2 Nm
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	-

Terminal						Tin-plated copper alloy
COLOURS						
Standard		On request				
GN		GY	BK	BL	RD	YL OG
POLES		NAME			3D FILE	
2		MTS212-10-C			File available	
3		MTS213-10-C			File available	