


MBE15_-5,08-V-L

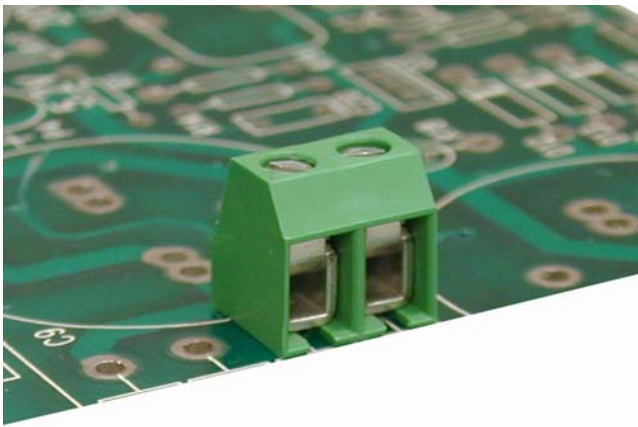

GENERAL INFORMATION

pitch	5,08 mm
Height	10.20 mm
Depth	8.6 mm
Dimensional class	Bassa
Wire section	2,5 mm² / 14 AWG
Clamp opening size	2,6 x 2 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
impulse voltage	2,5 kV

MECHANICAL CHARACTERISTICS

Screw	M2,5
Recommended torque	0,4÷0 Nm / 3,6÷3.3 in.lbs

APPROVALS DATA



EN 60998-1

Current	17,5 A
Voltage	450 V
Wire section	1,5 mm²
Torque	0,4 Nm
FILE	EP151



EN 60998-1

24 A
450 V
2,5 mm²
0,4 Nm
40019705



UL 1059

20 A factory / 15 A field
300 V
14 AWG
3,6 Nm
E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

COLOURS

Standard



On request



POLES	NAME	3D FILE
2	MBE152-5,08-V-L	File not available for this product
3	MBE153-5,08-V-L	File not available for this product