


ML254-5-D-LCS

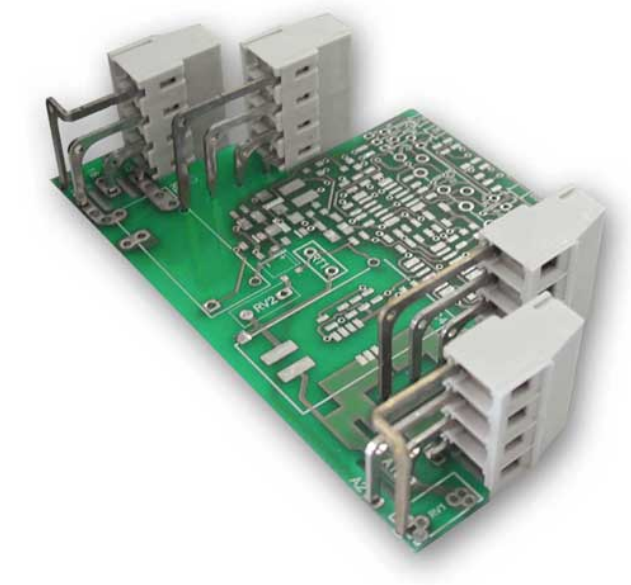

GENERAL INFORMATION

pitch	5 mm
Height	15.3 mm
Depth	9.5 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.7 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
	-

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1		UL 1059
Current	16 A	-	15 A factory / 15 A field
Voltage	250 V	-	300 V
Wire section	2,5 mm²	-	14 AWG
Torque	0,5 Nm	-	4,5 Nm
FILE	CA02.01614	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy

Terminal		Tin-plated copper alloy	
COLOURS			
Standard		On request	
GY		GN	BK
		BL	RD
		YL	OG
POLES		NAME	
4		ML254-5-D-LCS	
		3D FILE	
		File available	