
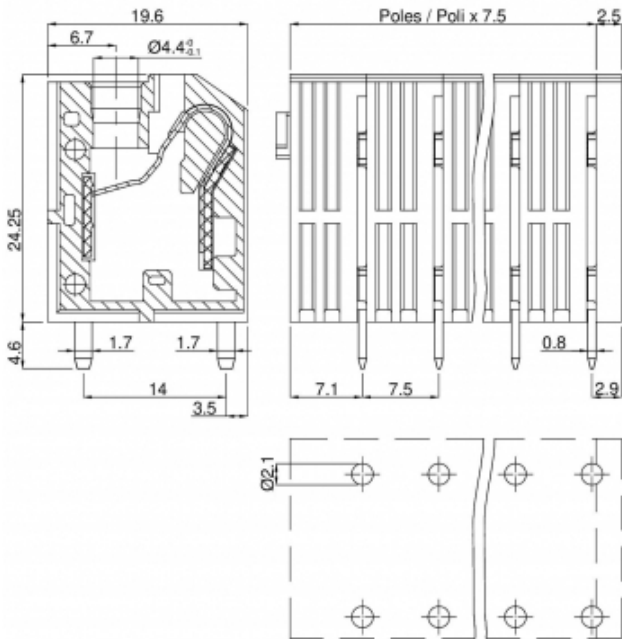


MP6__-7,5-V

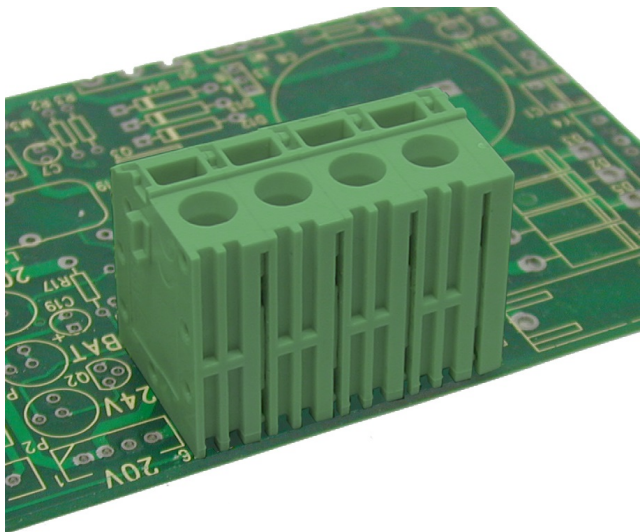

GENERAL INFORMATION

pitch	7,5 mm
Height	24.25 mm
Depth	19.6 mm
Dimensional class	Alta
Wire section	6 mm² / 8 AWG
Clamp opening size	-
Wire stripping	max 21 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	41 A
Voltage	750 V
	-

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current

-

-

-

Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-
MATERIALS			
Housing	PA - UL 94 V0		
Screw	-		
Spring	Spring steel		
Terminal	Tin-plated copper alloy		

COLOURS

Standard



On request



POLES	NAME	3D FILE
01	MP601-7,5-V	File not available for this product
02	MP602-7,5-V	File not available for this product
03	MP603-7,5-V	File not available for this product
04	MP604-7,5-V	File not available for this product
05	MP605-7,5-V	File not available for this product
06	MP606-7,5-V	File not available for this product
07	MP607-7,5-V	File not available for this product
08	MP608-7,5-V	File not available for this product
09	MP609-7,5-V	File not available for this product
10	MP610-7,5-V	File not available for this product
11	MP611-7,5-V	File not available for this product
12	MP612-7,5-V	File not available for this product
13	MP613-7,5-V	File not available for this product
14	MP614-7,5-V	File not available for this product
16	MP616-7,5-V	File not available for this product
17	MP617-7,5-V	File not available for this product
18	MP618-7,5-V	File not available for this product
19	MP619-7,5-V	File not available for this product
20	MP620-7,5-V	File not available for this product
21	MP621-7,5-V	File not available for this product
22	MP622-7,5-V	File not available for this product