


MV27_-7,5-H

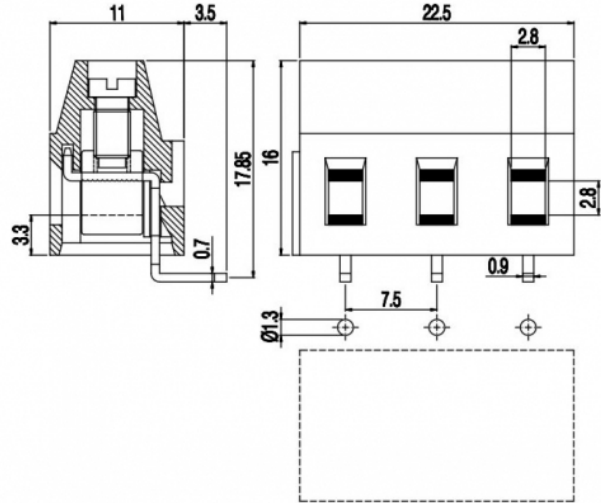

GENERAL INFORMATION

pitch	7,5 mm
Height	16 mm
Depth	11 mm
Dimensional class	Media
Wire section	2.4 mm ² / 14 AWG
Clamp opening size	2.8 x 2.8 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	750 V
Test Voltage	3 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	16 A	16 A	16 A factory / 15 A field
Voltage	750 V	750 V	300 V
Wire section	2.5 mm ²	2.5 mm ²	14 ÷ 30 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	EP149	40023956	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy

Terminal
SCIP Number
COLOURS

Tin-plated copper alloy
5f030aac-dc47-4381-afcc-ec8e4be57bf7

Standard

On request



POLES

2
3

NAME

MV272-7,5-H
MV273-7,5-H

3D FILE

File not available for this product
File not available for this product