


# MV49\_-9,52-H

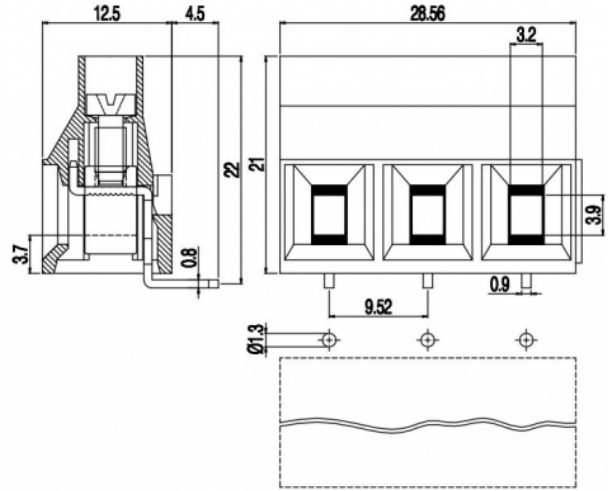

**GENERAL INFORMATION**

pitch	9,52 mm
Height	21 mm
Depth	12.5 mm
Dimensional class	Alta
Wire section	6.0 mm <sup>2</sup> / 10 AWG
Clamp opening size	3.2 x 3.9 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

**ELECTRICAL CHARACTERISTICS**

Current	32 A
Voltage	750 V
Test Voltage	3 kVrms/60s

**MECHANICAL CHARACTERISTICS**

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

**APPROVALS DATA**



	<b>EN 60998-1</b>	<b>EN 60998-1</b>	<b>UL 1059</b>
Current	32 A	25 A	30 A factory / 30 A field
Voltage	750 V	750 V	600 V
Wire section	6.0 mm <sup>2</sup>	4.0 mm <sup>2</sup>	10 ÷ 30 AWG
Torque	0.8 Nm	0.5 Nm	7.2 Lb-in
FILE	EP150	40014734	E178356

**MATERIALS**

Housing	PA - UL 94 V0
Screw	Galvanized steel

Clamp  
Terminal  
SCIP Number  
**COLOURS**

Nickel-plated copper alloy  
Tin-plated copper alloy  
c1d7b77c-07f2-4fff-b171-2a85bced087d

Standard



On request



**POLES**

2  
3

**NAME**

MV492-9,52-H  
MV493-9,52-H

**3D FILE**

File available  
File available