


MVL47_-7,5-V

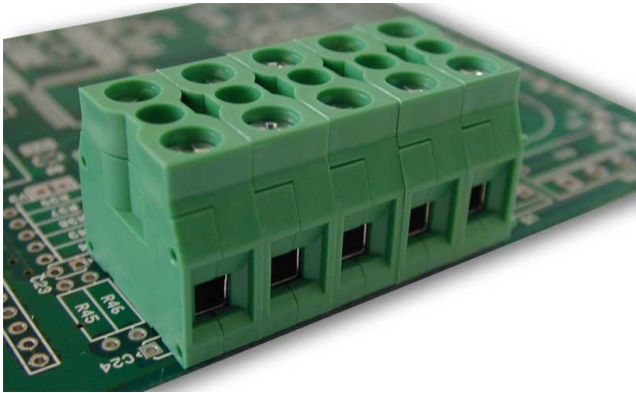

GENERAL INFORMATION

pitch	7,5 mm
Height	18.4 mm
Depth	20.6 mm
Dimensional class	Alta
Wire section	6.0 mm ² / 10 AWG
Clamp opening size	3.2 x 3.9 mm
Wire stripping	max 8.5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	41 A
Voltage	750 V
Test Voltage	3 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	30 A factory / 30 A field
Wire section	-	-	300 V
Torque	-	-	20 ÷ 10 AWG
FILE	-	-	7.2 Lb-in
			E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	63f6e92b-e740-4410-a85b-63970f1b7663

COLOURS

Standard



On request



POLES

1

NAME

MVL471-7,5-V

3D FILE

File available