


MVS15\_-5-H-L

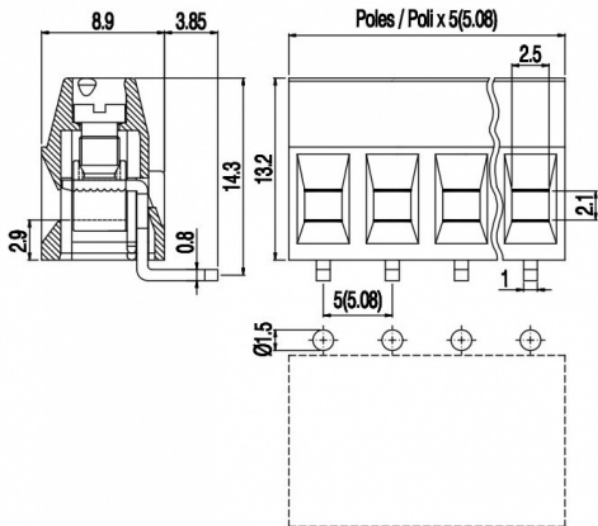

GENERAL INFORMATION

pitch	5 mm
Height	13.2 mm
Depth	8.9 mm
Dimensional class	Bassa
Wire section	1.5 mm² / 16 AWG
Clamp opening size	2.5 x 2.1 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	17.5 A
Voltage	450 V
Test Voltage	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1		UL 1059
Current	17.5 A	-	17.5 A factory / 10 A field
Voltage	450 V	-	300 V
Wire section	1.5 mm²	-	16 ÷ 30 AWG
Torque	0.5 Nm	-	4.5 Lb-in

FILE	CA02.00598	-	E178356
MATERIALS			
Housing			PA - UL 94 V0
Screw			Galvanized steel
Clamp			Nickel-plated copper alloy
Terminal			Tin-plated copper alloy
SCIP Number			713ad43e-8dff-4607-9cfa-843d4a730153
COLOURS			
	Standard	On request	
	<div>GN</div>	<div>GY</div> <div>BK</div> <div>BL</div> <div>RD</div> <div>YL</div> <div>OG</div>	
POLES	NAME	3D FILE	
2	MVS152-5-H-L	File not available for this product	
3	MVS153-5-H-L	File not available for this product	
4	MVS154-5-H-L	File not available for this product	
5	MVS155-5-H-L	File not available for this product	
6	MVS156-5-H-L	File not available for this product	
7	MVS157-5-H-L	File not available for this product	
8	MVS158-5-H-L	File not available for this product	
9	MVS159-5-H-L	File not available for this product	
10	MVS1510-5-H-L	File not available for this product	
11	MVS1511-5-H-L	File not available for this product	
12	MVS1512-5-H-L	File not available for this product	