
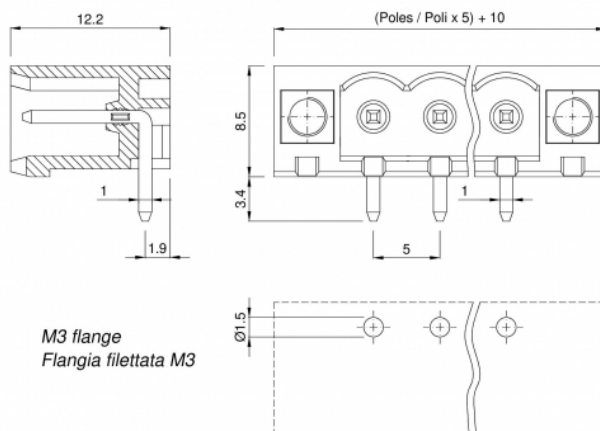


# PV\_\_-5-HR-K

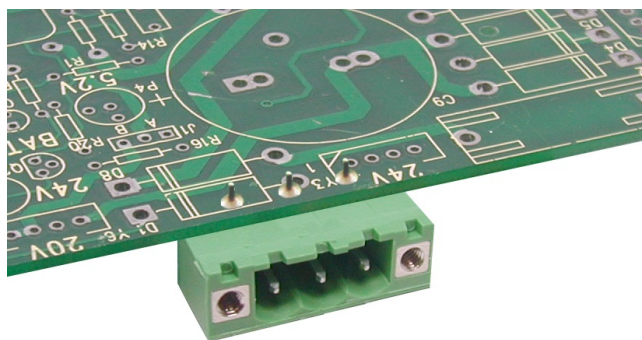

### GENERAL INFORMATION

pitch	5 mm
Height	8.5 mm
Depth	12.2 mm
Dimensional class	Alta
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-

### ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

### MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

### APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	16 A factory / 16 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	0086c05b-2b6e-457a-b57e-4d998c8f5f0d

### COLOURS

Standard

On request



**POLES**

02  
03



**NAME**

PV02-5-HR-K  
PV03-5-HR-K

**3D FILE**

File available  
File available