
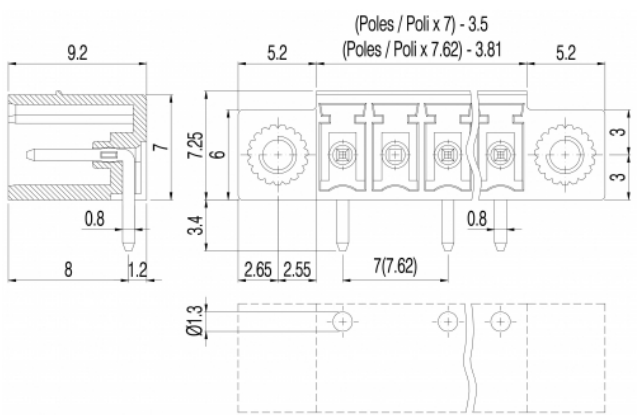


PV\_\_-7-H-K

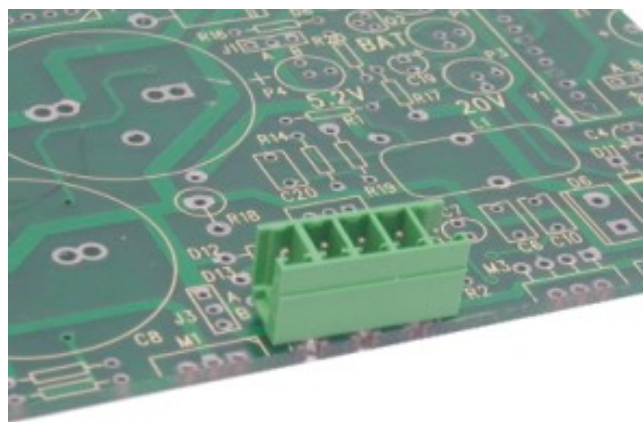

GENERAL INFORMATION

pitch	7 mm
Height	7.25 mm
Depth	9.2 mm
Dimensional class	Alta
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	500 V
Test Voltage	6 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



	EN 61984	UL 1059
Current	11 A	11 A factory / 11 A field
Voltage	400 V	300 V
Wire section	-	-
Torque	-	-
FILE	40048261	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	892ed63d-670d-4367-9365-34dfcaff593c

COLOURS

Standard	On request
----------	------------



**POLES**

02  
03  
04  
05  
06  
07  
08  
09  
10  
11

**NAME**

PV02-7-H-K  
PV03-7-H-K  
PV04-7-H-K  
PV05-7-H-K  
PV06-7-H-K  
PV07-7-H-K  
PV08-7-H-K  
PV09-7-H-K  
PV10-7-H-K  
PV11-7-H-K

**3D FILE**

File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product