


PVSD__-10

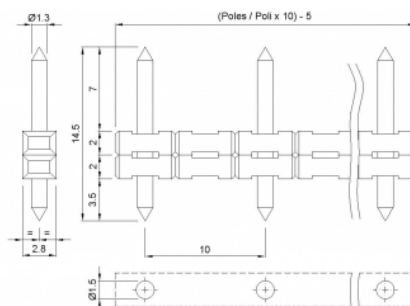

GENERAL INFORMATION

pitch	10 mm
Height	14.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	630 V
Test Voltage	6 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	18 A factory / 15 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

On request



POLES

02
03
04
05
06
07
08
09
10
11
12

NAME

PVSD02-10
PVSD03-10
PVSD04-10
PVSD05-10
PVSD06-10
PVSD07-10
PVSD08-10
PVSD09-10
PVSD10-10
PVSD11-10
PVSD12-10

3D FILE

File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available