

PVSF__-5-V-D45



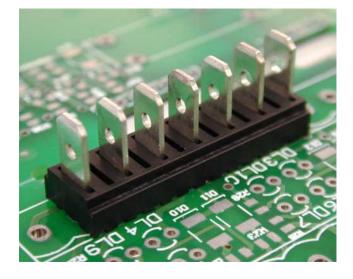

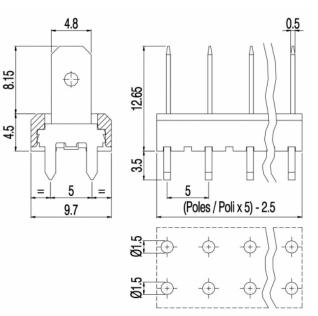

GENERAL INFORMATION

pitch Height Depth Dimensional class Wire section Clamp opening size Wire stripping Operating temperature ELECTRICAL CHARACTERISTICS

Current Voltage impulse voltage

MECHANICAL CHARACTERISTICS

Screw Recommended torque APPROVALS DATA

R
CT I
CSV

Current
Voltage
Wire section
Torque
FILE
MATERIALC

MATERIALS

Housing Screw Clamp Terminal

5 mm
12.65 mm
9.7 mm
n/a
-
-
-
-40 ÷ +130 °C

24 A 250 V 4 kV





UL 1059			
18 A factory / 15 A field			
300 V			
-			
-			
E178356			

PA - UL 94 V0

Tin-plated copper alloy

SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba		
COLOURS			
Standard	On request		
BK	GN GY BL RD	YL OG	
POLES	NAME	3D FILE	
02	PVSF02-5-V-D45	File not available for this product	
03	PVSF03-5-V-D45	File not available for this product	
04	PVSF04-5-V-D45	File not available for this product	
05	PVSF05-5-V-D45	File not available for this product	
06	PVSF06-5-V-D45	File not available for this product	
07	PVSF07-5-V-D45	File not available for this product	
08	PVSF08-5-V-D45	File not available for this product	
09	PVSF09-5-V-D45	File not available for this product	
10	PVSF10-5-V-D45	File not available for this product	
11	PVSF11-5-V-D45	File not available for this product	
12	PVSF12-5-V-D45	File not available for this product	
13	PVSF13-5-V-D45	File not available for this product	
14	PVSF14-5-V-D45	File not available for this product	
15	PVSF15-5-V-D45	File not available for this product	
16	PVSF16-5-V-D45	File not available for this product	
17	PVSF17-5-V-D45	File not available for this product	
18	PVSF18-5-V-D45	File not available for this product	
19	PVSF19-5-V-D45	File not available for this product	
20	PVSF20-5-V-D45	File not available for this product	
21	PVSF21-5-V-D45	File not available for this product	
22	PVSF22-5-V-D45	File not available for this product	
23	PVSF23-5-V-D45	File not available for this product	
24	PVSF24-5-V-D45	File not available for this product	