
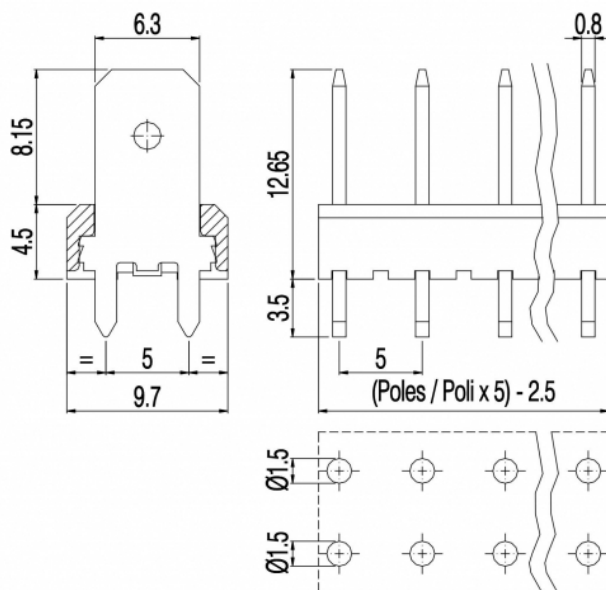


PVSF__-5-V-D68

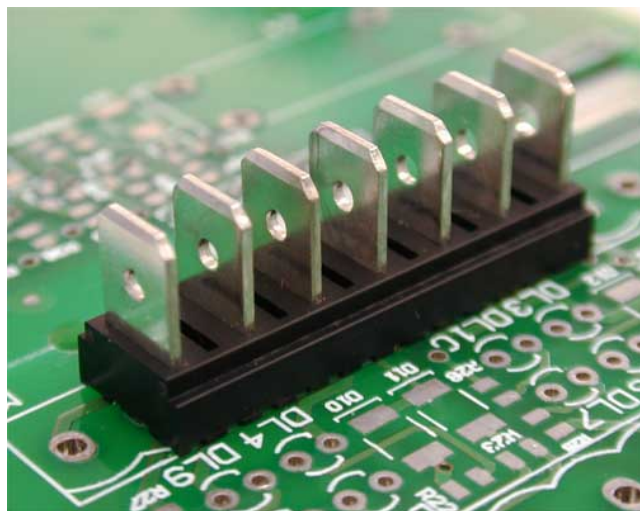

GENERAL INFORMATION

pitch	5 mm
Height	12.65 mm
Depth	9.7 mm
Dimensional class	n/a
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	18 A factory / 15 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

SCIP Number

COLOURS

Standard



On request



POLES

- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24

NAME

- PVSF02-5-V-D68
- PVSF03-5-V-D68
- PVSF04-5-V-D68
- PVSF05-5-V-D68
- PVSF06-5-V-D68
- PVSF07-5-V-D68
- PVSF08-5-V-D68
- PVSF09-5-V-D68
- PVSF10-5-V-D68
- PVSF11-5-V-D68
- PVSF12-5-V-D68
- PVSF13-5-V-D68
- PVSF14-5-V-D68
- PVSF15-5-V-D68
- PVSF16-5-V-D68
- PVSF17-5-V-D68
- PVSF18-5-V-D68
- PVSF19-5-V-D68
- PVSF20-5-V-D68
- PVSF21-5-V-D68
- PVSF22-5-V-D68
- PVSF23-5-V-D68
- PVSF24-5-V-D68

3D FILE

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product