
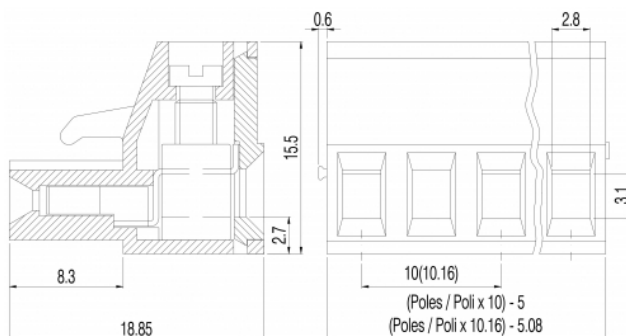


# SH\_\_-10-M

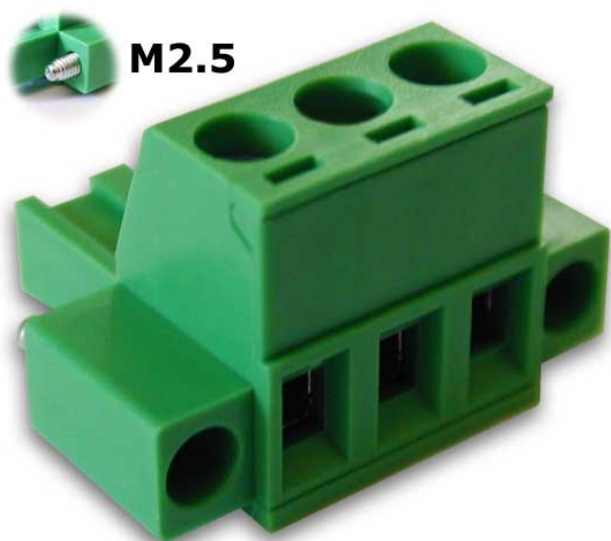

## GENERAL INFORMATION

pitch	10 mm
Height	15.5 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	12 A
Voltage	500 V
Test Voltage	6 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

## APPROVALS DATA



Current	EN 61984	15 A	EN 61984	15 A	UL 1059	12 A factory / 12 A field
	Voltage	500 V	Voltage	500 V		600 V
Wire section	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	Wire section	2.5 mm <sup>2</sup>		14 ÷ 30 AWG
Torque	0.5 Nm	0.5 Nm	Torque	0.5 Nm		4.5 Lb-in
FILE	CA02.04178	40005779	FILE			E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

**COLOURS**

Standard

On request



**POLES**

- 01
- 02

**NAME**

- SH01-10-M
- SH02-10-M

**3D FILE**

- File not available for this product
- File not available for this product