


# SH\_\_-10-K

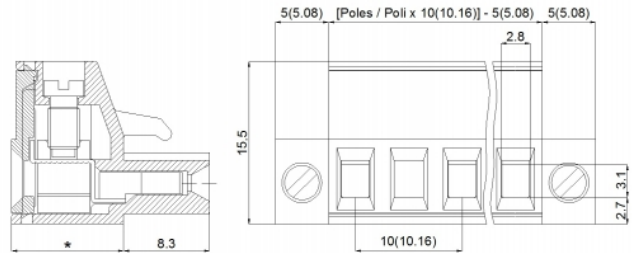

\* = 10.55 for/per SH02+11-10,16-K  
 \* = 10.55 for/per SH02+07-10-K  
 \* = 10.9 for/per SH08+11-10-K

M3 flange screw  
 Flangia a vite M3

## GENERAL INFORMATION

pitch	10 mm
Height	15.5 mm
Depth	18.8 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
Test Voltage	6 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

## APPROVALS DATA



	<b>EN 61984</b>	<b>EN 61984</b>	<b>UL 1059</b>
Current	16 A	15 A	12 A factory / 12 A field
Voltage	500 V	500 V	600 V
Wire section	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	14 ÷ 60 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

**COLOURS**

Standard



On request



**POLES**

- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11

**NAME**

- SH02-10-K
- SH03-10-K
- SH04-10-K
- SH05-10-K
- SH06-10-K
- SH07-10-K
- SH08-10-K
- SH09-10-K
- SH10-10-K
- SH11-10-K

**3D FILE**

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product