


# SH\_\_-15

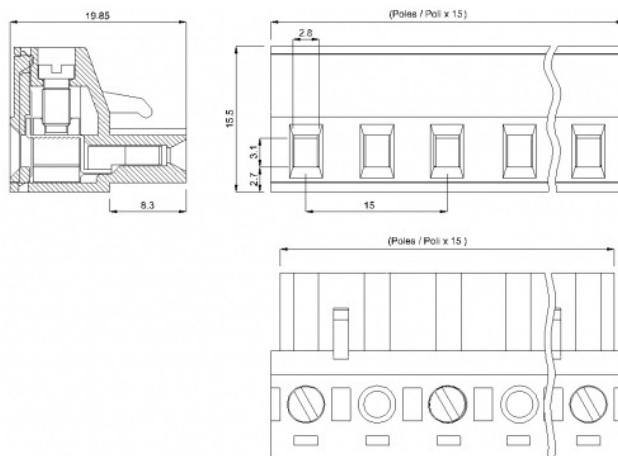

### GENERAL INFORMATION

pitch	15 mm
Height	15.50 mm
Depth	19.85 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

### ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	1000 V
Test Voltage	8 kVrms/60s

### MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

### APPROVALS DATA



	<b>EN 60998-1</b>	<b>EN 60998-1</b>	<b>UL 1059</b>
Current	16 A	15 A	12 A factory / 12 A field
Voltage	500 V	500 V	600 V
Wire section	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	14 ÷ 30 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

**COLOURS**

Standard



On request



**POLES**

- 02
- 03
- 04
- 05

**NAME**

- SH02-15
- SH03-15
- SH04-15
- SH05-15

**3D FILE**

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product