


# SHS\_\_-10-L

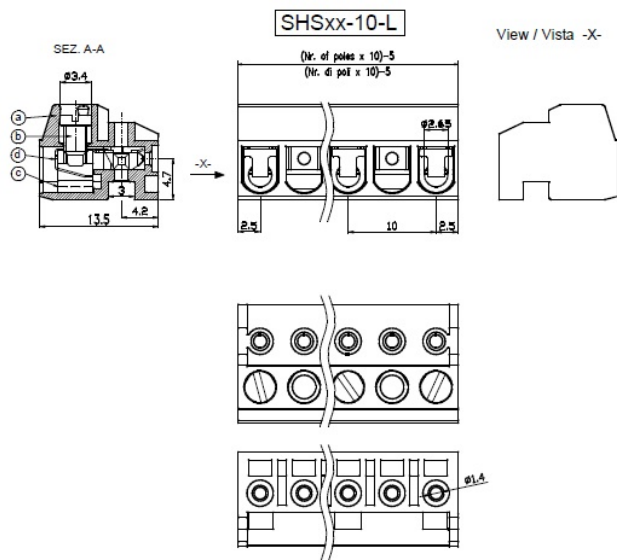

## GENERAL INFORMATION

pitch	10 mm
Height	10.8 mm
Depth	13.5 mm
Dimensional class	Media
Wire section	1.5 mm <sup>2</sup> / 16 AWG
Clamp opening size	-
Wire stripping	max 6 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	630 V
Test Voltage	6 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷3.9 in.lbs

## APPROVALS DATA



		EN 61984	UL 1059
Current	-	12 A	10 A factory / 10 A field
Voltage	-	500 V	300 V
Wire section	-	0.2÷2.5 mm <sup>2</sup>	16 ÷ 30 AWG
Torque	-	0.4 Nm	3.5 Lb-in
FILE	-	40053107	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	f59fce50-2030-4a8c-a1d5-32dbe6d47a1f

**COLOURS**

Standard



On request



**POLES**

- 01
- 02
- 03
- 04
- 05
- 06

**NAME**

- SHS01-10-L
- SHS02-10-L
- SHS03-10-L
- SHS04-10-L
- SHS05-10-L
- SHS06-10-L

**3D FILE**

- File available
- File available
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product