


SHS__-5-ML

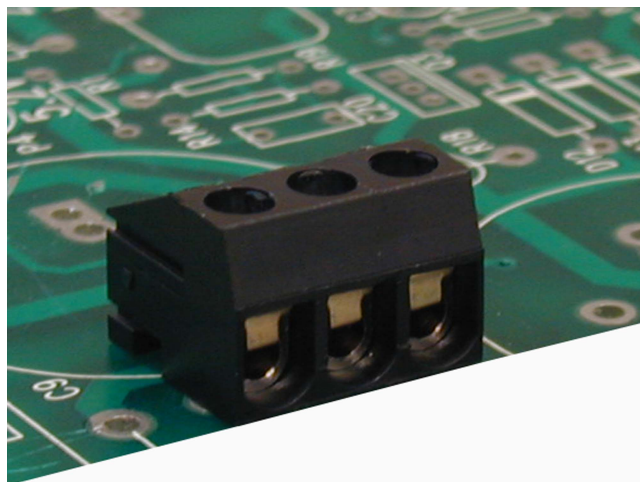

GENERAL INFORMATION

pitch	5 mm
Height	10.8 mm
Depth	13.5 mm
Dimensional class	Media
Wire section	1.5 mm ² / 16 AWG
Clamp opening size	-
Wire stripping	max 6 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	-
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷3.9 in.lbs

APPROVALS DATA



Current	-	EN 61984	12 A	UL 1059	10 A factory / 10 A field
Voltage	-		200 V		300 V
Wire section	-		0.2÷2.5 mm ²		16 ÷ 30 AWG
Torque	-		0.4 Nm		3.5 Lb-in
FILE	-		40053107		E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	f59fce50-2030-4a8c-a1d5-32dbe6d47a1f

COLOURS

Standard

On request

BK

GN

GY

BL

RD

YL

OG

POLES

02
03
04
05
06
07
08
09
10
11
12

NAME

SHS02-5-ML
SHS03-5-ML
SHS04-5-ML
SHS05-5-ML
SHS06-5-ML
SHS07-5-ML
SHS08-5-ML
SHS09-5-ML
SHS10-5-ML
SHS11-5-ML
SHS12-5-ML

3D FILE

File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product