
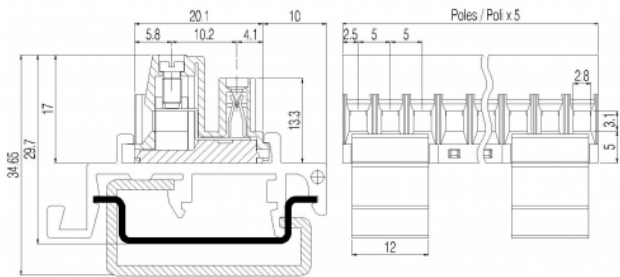


SVR__-10-DR

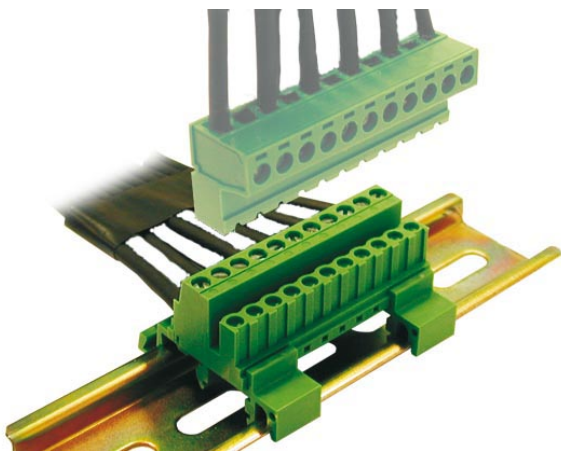

GENERAL INFORMATION

pitch	10 mm
Height	17 mm
Depth	20.1 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	500 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	12 A factory / 12 A field
Wire section	-	-	600 V
Torque	-	-	14 ÷ 30 AWG
FILE	-	-	4,5 Lb-in
			E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	2b03b531-92df-4ed5-8cb8-d5dde059d488

COLOURS

Standard	On request
----------	------------



POLES

02
03
04
05
06



NAME

SVR02-10-DR
SVR03-10-DR
SVR04-10-DR
SVR05-10-DR
SVR06-10-DR

3D FILE

File available
File not available for this product
File not available for this product
File not available for this product
File not available for this product