
## **ZRSL**





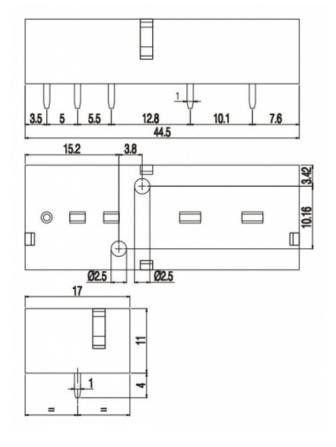

## **GENERAL INFORMATION**

pitch Height Depth

**Dimensional class** 

Wire section

Clamp opening size

Wire stripping

**Operating temperature** 

## **ELECTRICAL CHARACTERISTICS**

Current

Voltage

Test Voltage

**MECHANICAL CHARACTERISTICS** 

Screw

Recommended torque

**APPROVALS DATA** 







11 mm

17 mm

-30 ÷ +70 °C

2 kVrms/60s

n/a

5 A

250 V

Wire section - - -

Torque - - - -

FILE - - -

**MATERIALS** 

Housing Screw -

Clamp

Terminal Tin-plated copper alloy

**COLOURS** 

Standard On request

