
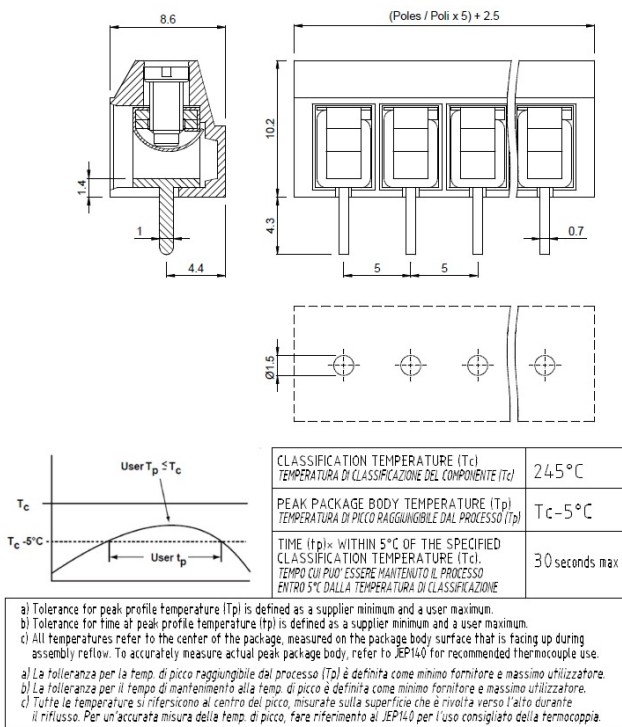


MBE15\_-5-V-TH-BK

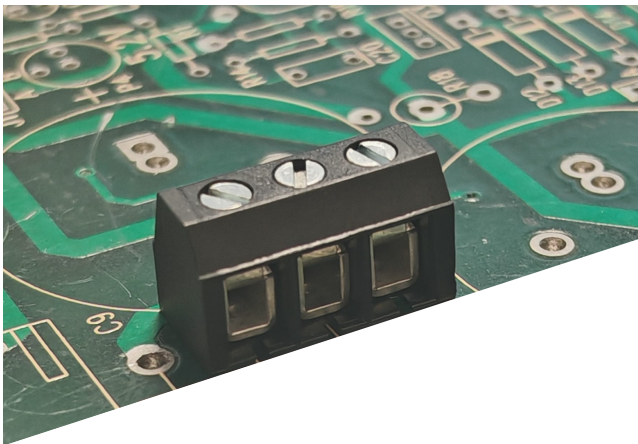

GENERAL INFORMATION

pitch	5 mm
Height	10.2 mm
Depth	8.6 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	-
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷4 in.lbs

APPROVALS DATA



Current	-	EN 60998-1	24 A	UL 1059	20 A factory / 15 A field
Voltage	-		450 V		300 V
Wire section	-		2.5 mm²		14 AWG
Torque	-		0.4 Nm		3.6 Lb-in
FILE	-		40019705		E178356

MATERIALS

Housing	-
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	f96aa5fb-ce76-4818-a732-b41ce6983956
COLOURS	

Standard



On request

POLES	NAME	3D FILE
2	MBE152-5-V-TH-BK	File available
3	MBE153-5-V-TH-BK	File available
4	MBE154-5-V-TH-BK	File available
5	MBE155-5-V-TH-BK	File available
6	MBE156-5-V-TH-BK	File available
7	MBE157-5-V-TH-BK	File available
8	MBE158-5-V-TH-BK	File available
9	MBE159-5-V-TH-BK	File not available for this product
10	MBE1510-5-V-TH-BK	File not available for this product
11	MBE1511-5-V-TH-BK	File not available for this product
12	MBE1512-5-V-TH-BK	File not available for this product