


MG1__-5-H

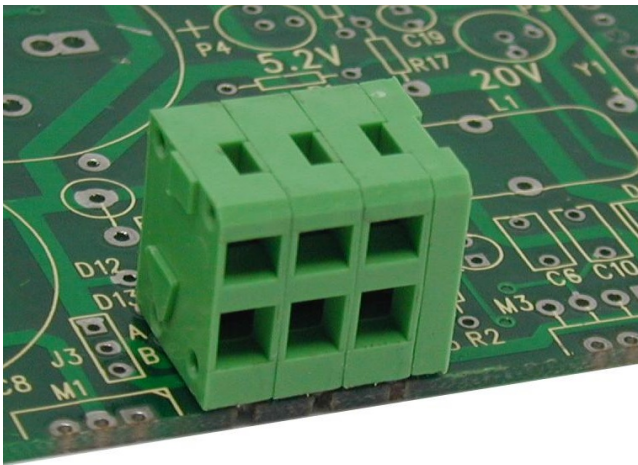

GENERAL INFORMATION

pitch	5 mm
Height	13.2 mm
Depth	15.4 mm
Dimensional class	Bassa
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.45 x 2.45 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
Test Voltage	2 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	17 A factory / 17 A field
Wire section	-	-	300 V
Torque	-	-	12 ÷ 30 AWG
FILE	-	-	-
			E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Spring	Spring steel
Terminal	Tin-plated copper alloy
SCIP Number	

Deprecated: htmlspecialchars(): Passing null to parameter #1 (\$string) of type string is deprecated in

COLOURS

Standard



On request



POLES

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23

NAME

- MG101-5-H
- MG102-5-H
- MG103-5-H
- MG104-5-H
- MG105-5-H
- MG106-5-H
- MG107-5-H
- MG108-5-H
- MG109-5-H
- MG110-5-H
- MG111-5-H
- MG112-5-H
- MG113-5-H
- MG114-5-H
- MG115-5-H
- MG116-5-H
- MG117-5-H
- MG118-5-H
- MG119-5-H
- MG120-5-H
- MG121-5-H
- MG122-5-H
- MG123-5-H

3D FILE

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product