


# MPFA

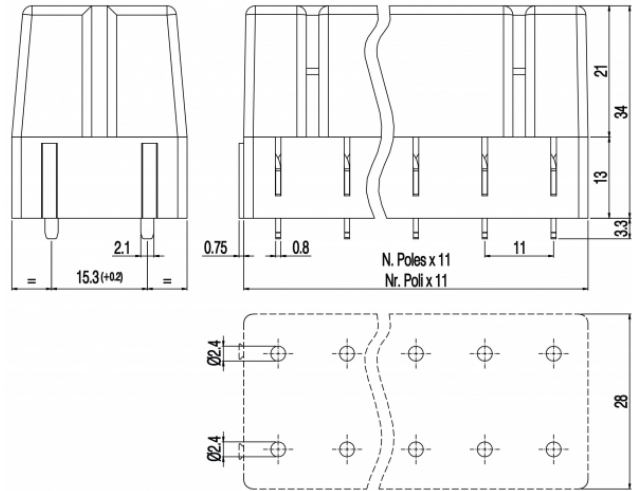

USE WITH A FUSE

## GENERAL INFORMATION

pitch	-
Height	34 mm
Depth	15.32 mm
Dimensional class	n/a
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	1÷40 A
Voltage	- V
Test Voltage	2 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

**COLOURS**

Standard

On request



**POLES**

- 2
- 3
- 4
- 5
- 6

**NAME**

- MPFA
- MPFA
- MPFA
- MPFA
- MPFA

**3D FILE**

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product