


MPT1010-D-EZ-O

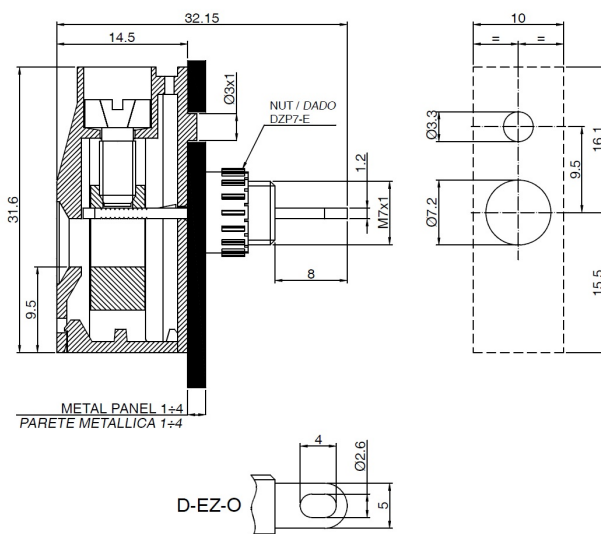

GENERAL INFORMATION

| | |
|-----------------------|----------------------------|
| pitch | 10 mm |
| Height | 31.6 mm |
| Depth | 14.5 mm |
| Dimensional class | n/a |
| Wire section | 10 mm ² / 6 AWG |
| Clamp opening size | 5.3 x 5.3 mm |
| Wire stripping | max 13.5 mm |
| Operating temperature | -40 ÷ +130 °C |

ELECTRICAL CHARACTERISTICS

| | |
|--------------|-------|
| Current | 57 A |
| Voltage | 450 V |
| Test Voltage | - |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|--------------------------------|
| Screw | M4 |
| Recommended torque | 1.2÷1.32 Nm / 10.8÷11.9 in.lbs |

APPROVALS DATA



| | EN 60998-1 | UL 1059 |
|--------------|--------------------------|---------------------------|
| Current | 57 A | 65 A factory / 65 A field |
| Voltage | 450 V | 600 V |
| Wire section | 0,2÷10,0 mm ² | 6÷30 ÷ 30 AWG |
| Torque | 1,2 Nm | 15,8 Lb-in |
| FILE | 40014733 | E178356 |

MATERIALS

| | |
|----------|----------------------------|
| Housing | PA - UL 94 V0 |
| Screw | Galvanized steel |
| Clamp | Nickel-plated copper alloy |
| Terminal | Tin-plated copper alloy |

COLOURS



On request



POLES
01

NAME
MPT1010-D-EZ-O

3D FILE
File available