


MPT610

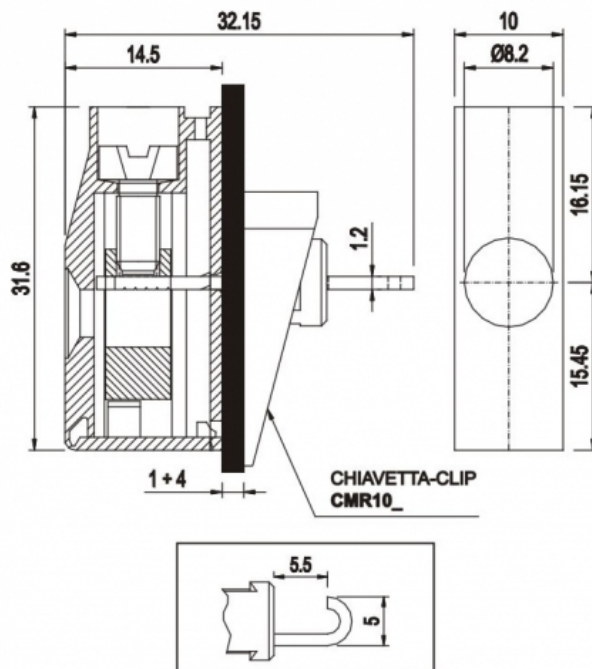

GENERAL INFORMATION

pitch	10 mm
Height	31.6 mm
Depth	14.5 mm
Dimensional class	Alta
Wire section	6.0 mm ² / 10 AWG
Clamp opening size	-
Wire stripping	max 13.5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	41 A
Voltage	450 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M4
Recommended torque	1.2÷1.32 Nm / 10.8÷11.9 in.lbs

APPROVALS DATA



EN 60998-1
41 A
450 V
6.0 mm²
1.2 Nm
CA02.01615



EN 60998-1
41 A
450 V
6.0 mm²
1.2 Nm
40014733



UL 1059
50 A factory / 50 A field
600 V
8 AWG
15.8 Lb-in
E178356

Current
Voltage
Wire section
Torque
FILE

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	682bc9e2-387e-4e6a-8f33-35e318bd211c

COLOURS



On request



POLES

01

NAME

MPT610

3D FILE

File available