


MVP35_-15-V

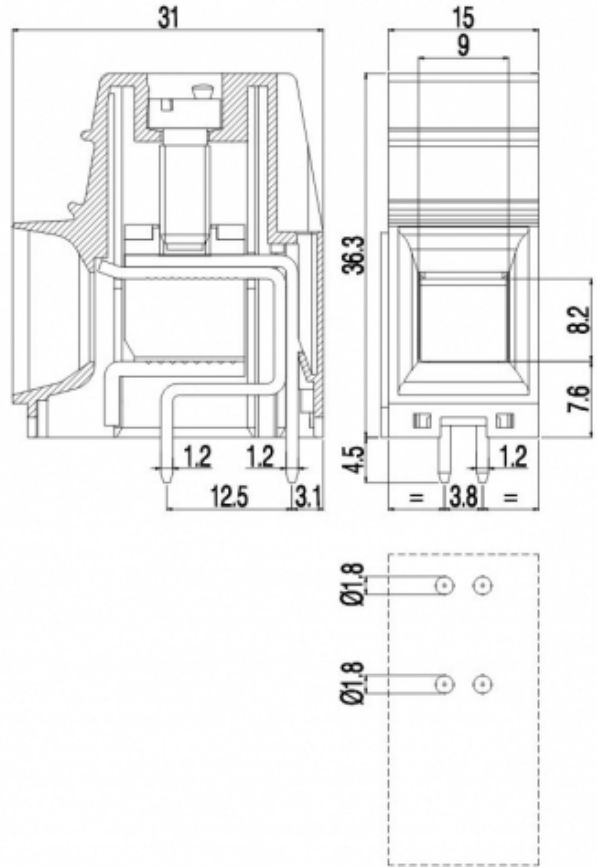

GENERAL INFORMATION

pitch	15 mm
Height	36.3 mm
Depth	31 mm
Dimensional class	Alta
Wire section	35 mm ² / 2 AWG
Clamp opening size	9 x 8.2 mm
Wire stripping	max 19 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	125 A
Voltage	1000 V
Test Voltage	3.5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M5
Recommended torque	3÷3.10 Nm / 27÷29.7 in.lbs

APPROVALS DATA





Current	-	-	UL 1059
Voltage	-	-	125 A factory / 125 A field
Wire section	-	-	600 V
Torque	-	-	1 ÷ 20 AWG
FILE	-	-	27 Lb-in
			E178356

MATERIALS

Housing			PA - UL 94 V0
Screw			Galvanized steel
Clamp			Nickel-plated copper alloy
Terminal			Tin-plated copper alloy

COLOURS

Standard

On request



POLES

1

NAME
MVP351-15-V

3D FILE
File available