


MVS15\_-10,16-H

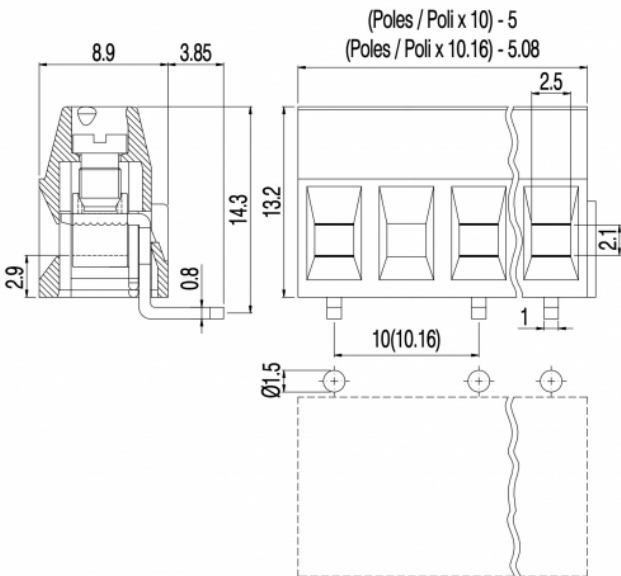

GENERAL INFORMATION

pitch	10,16 mm
Height	13.2 mm
Depth	8.9 mm
Dimensional class	Bassa
Wire section	1.5 mm² / 16 AWG
Clamp opening size	2.5 x 2.1 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	17.5 A
Voltage	750 V
impulse voltage	3 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1		UL 1059
Current	17.5 A	-	17.5 A factory / 10 A field
Voltage	750 V	-	600 V
Wire section	1.5 mm²	-	16 AWG
Torque	0.5 Nm	-	4.5 Lb-in
FILE	CA02.00598	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy

Terminal	Tin-plated copper alloy						
SCIP Number	713ad43e-8dff-4607-9cfa-843d4a730153						
COLOURS							
Standard	On request						
	<div>GN</div>	<div>GY</div>	<div>BK</div>	<div>BL</div>	<div>RD</div>	<div>YL</div>	<div>OG</div>
POLES	NAME			3D FILE			
1	MVS151-10,16-H			File not available for this product			
2	MVS152-10,16-H			File not available for this product			
3	MVS153-10,16-H			File not available for this product			
4	MVS154-10,16-H			File not available for this product			
5	MVS155-10,16-H			File not available for this product			
6	MVS156-10,16-H			File not available for this product			