
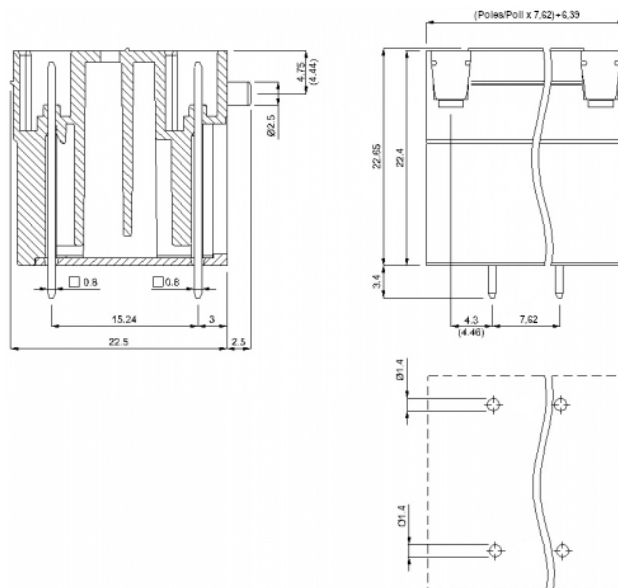


# PDV\_\_-7,62-V-K-S

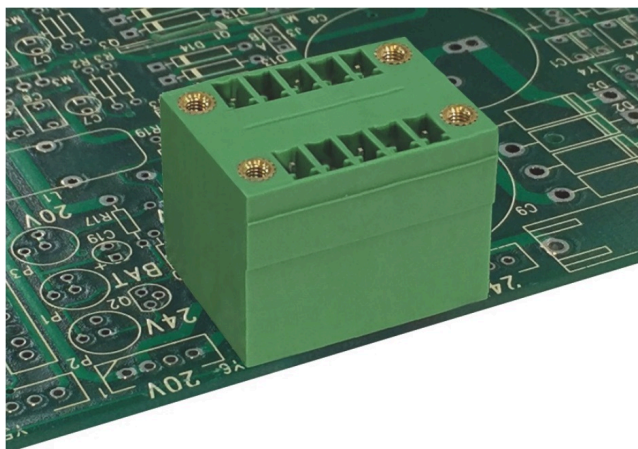

## GENERAL INFORMATION

pitch	7,62 mm
Height	22.65 mm
Depth	22.5 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	8 A
Voltage	400 V
Test Voltage	6 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	EN 61984	8 A	UL 1059	11 A factory / 11 A field
Voltage	-		400 V		150V (C) V
Wire section	-		-		-
Torque	-		-		-
FILE	-		40048261		E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

02

**NAME**

PDV02-7,62-V-K-S

**3D FILE**

File not available for this product