




PF__-5-H

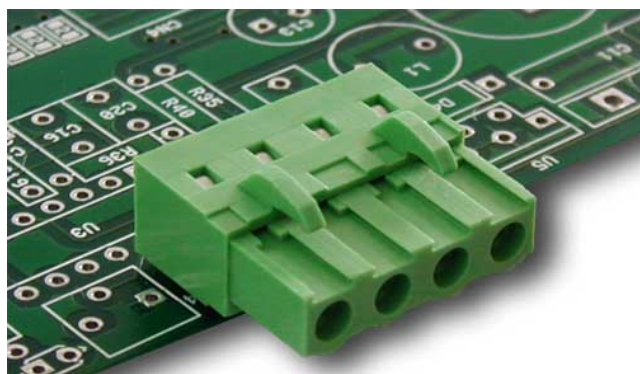



PFxx-5-H

No. of pins x 5

Nr. di poli x 5



Sect. A-A



PCB DRILLING
FORATURA CS

GENERAL INFORMATION

pitch	5 mm
Height	7.7 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	22 A factory / 20 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing			PA - UL 94 V0
---------	--	--	---------------

Screw -
 Clamp -
 Terminal Tin-plated copper alloy

COLOURS

Standard



On request



POLES

- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12

NAME

- PF02-5-H
- PF03-5-H
- PF04-5-H
- PF05-5-H
- PF06-5-H
- PF07-5-H
- PF08-5-H
- PF09-5-H
- PF10-5-H
- PF11-5-H
- PF12-5-H

3D FILE

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product