
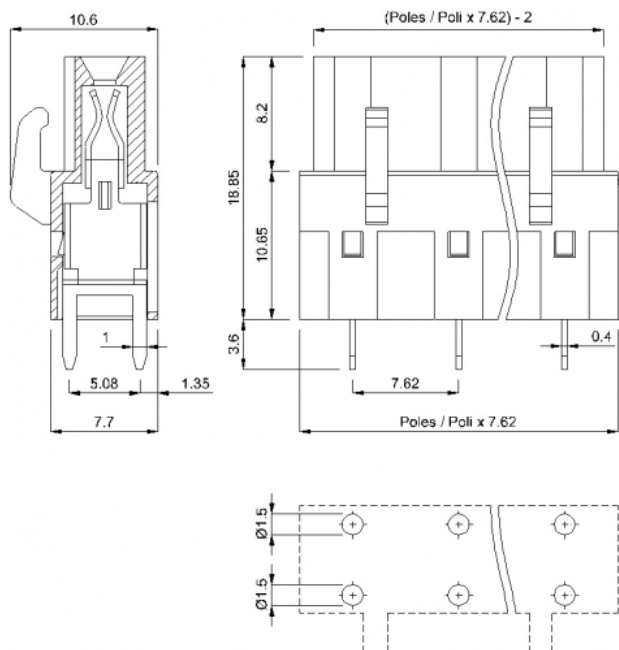


# PF\_\_-7,62-V-M

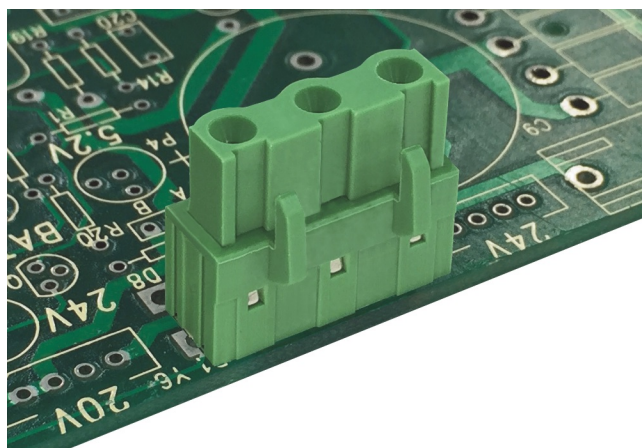

## GENERAL INFORMATION

pitch	7,62 mm
Height	18.85 mm
Depth	7.7 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +105 °C

## ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
Test Voltage	6 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	22 A factory / 20 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

## MATERIALS

Housing	-	-	PA - UL 94 V0
Screw	-	-	-

Clamp  
Terminal

-  
Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

- 02
- 03
- 04
- 05
- 06
- 07
- 08

**NAME**

- PF02-7,62-V-M
- PF03-7,62-V-M
- PF04-7,62-V-M
- PF05-7,62-V-M
- PF06-7,62-V-M
- PF07-7,62-V-M
- PF08-7,62-V-M

**3D FILE**

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product