
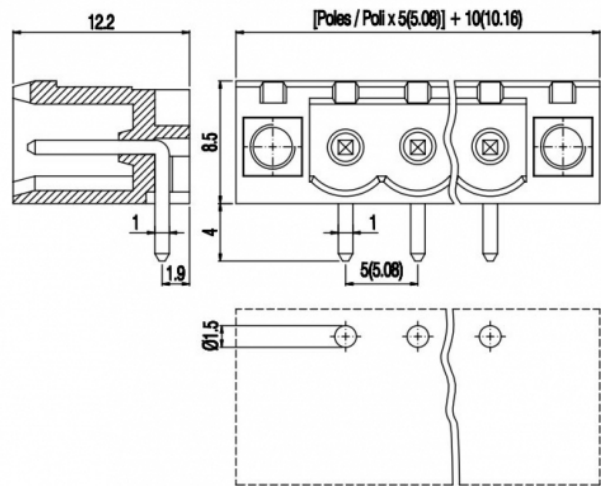


PV\_\_-5-H-K

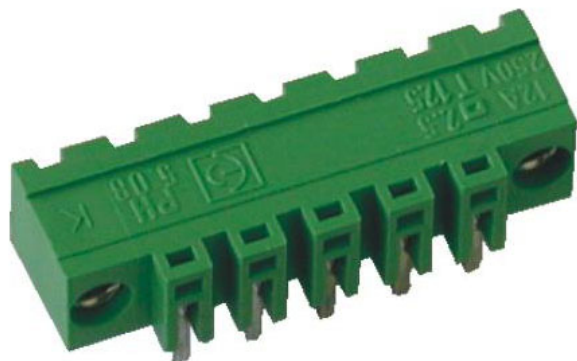

GENERAL INFORMATION

pitch	5 mm
Height	8.5 mm
Depth	12.2 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



	<b>EN 61984</b>	<b>EN 61984</b>	<b>UL 1059</b>
Current	16 A	12 A	16 A factory / 16 A field
Voltage	250 V	250 V	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	0086c05b-2b6e-457a-b57e-4d998c8f5fd0

COLOURS

			On request					
Standard								
GN			GY	BK	BL	RD	YL	OG
POLES	NAME		3D FILE					
02	PV02-5-H-K		File not available for this product					
03	PV03-5-H-K		File not available for this product					
04	PV04-5-H-K		File not available for this product					
05	PV05-5-H-K		File not available for this product					
06	PV06-5-H-K		File available					
07	PV07-5-H-K		File not available for this product					
08	PV08-5-H-K		File not available for this product					
09	PV09-5-H-K		File not available for this product					
10	PV10-5-H-K		File not available for this product					
11	PV11-5-H-K		File not available for this product					
12	PV12-5-H-K		File not available for this product					
13	PV13-5-H-K		File not available for this product					
14	PV14-5-H-K		File not available for this product					
15	PV15-5-H-K		File not available for this product					
16	PV16-5-H-K		File not available for this product					
17	PV17-5-H-K		File not available for this product					
18	PV18-5-H-K		File not available for this product					
19	PV19-5-H-K		File not available for this product					
20	PV20-5-H-K		File not available for this product					
21	PV21-5-H-K		File not available for this product					
22	PV22-5-H-K		File not available for this product					