
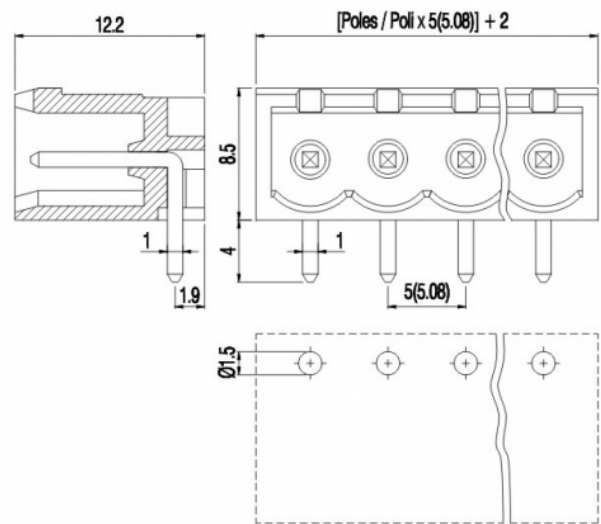


PV__-5-H-P

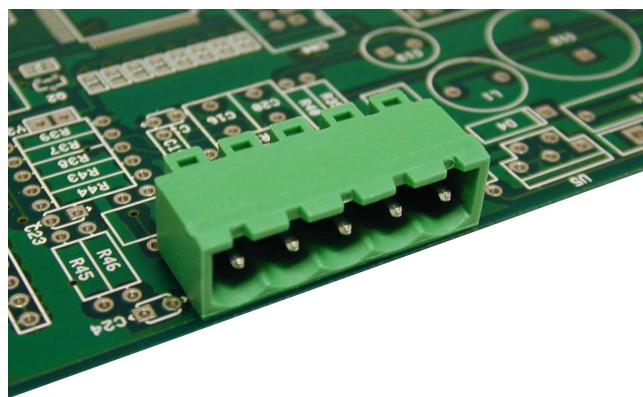

GENERAL INFORMATION

pitch	5 mm
Height	8.5 mm
Depth	12.2 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
impulse voltage	4 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



EN 61984
16 A
250 V
-
-
CA02.04178



EN 61984
12 A
250 V
-
-
40005779



UL 1059
16 A factory / 16 A field
300 V
-
-
E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

COLOURS

Standard		On request					
GN		GY	BK	BL	RD	YL	OG
POLES	NAME	3D FILE					
02	PV02-5-H-P	File available					
03	PV03-5-H-P	File available					
04	PV04-5-H-P	File available					
05	PV05-5-H-P	File available					
06	PV06-5-H-P	File available					
07	PV07-5-H-P	File available					
08	PV08-5-H-P	File available					
09	PV09-5-H-P	File available					
10	PV10-5-H-P	File available					
11	PV11-5-H-P	File available					
12	PV12-5-H-P	File available					
13	PV13-5-H-P	File not available for this product					
14	PV14-5-H-P	File not available for this product					
15	PV15-5-H-P	File not available for this product					
16	PV16-5-H-P	File available					
17	PV17-5-H-P	File not available for this product					
18	PV18-5-H-P	File not available for this product					
19	PV19-5-H-P	File not available for this product					
20	PV20-5-H-P	File not available for this product					
21	PV21-5-H-P	File not available for this product					
22	PV22-5-H-P	File not available for this product					
23	PV23-5-H-P	File not available for this product					
24	PV24-5-H-P	File not available for this product					