
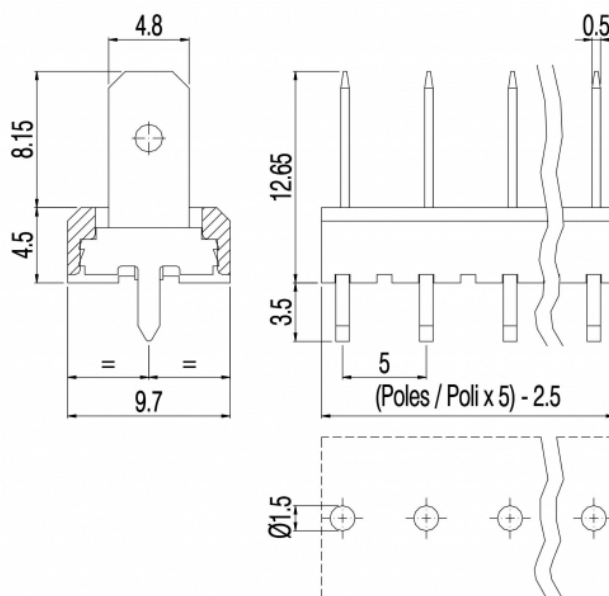


PVSF__-5-V-S45-1F

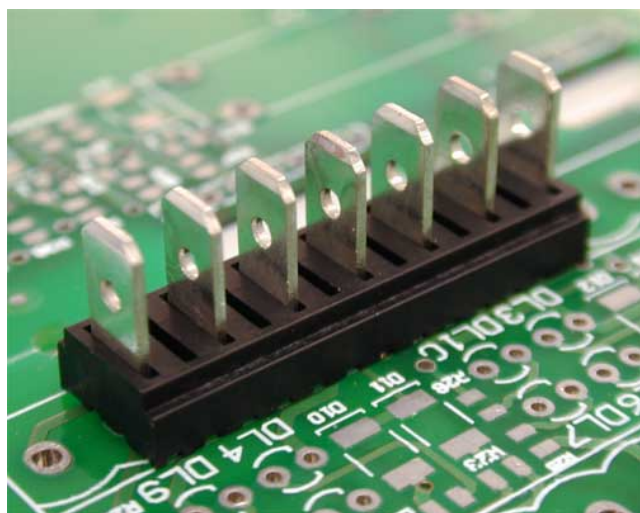

GENERAL INFORMATION

| | |
|-----------------------|---------------|
| pitch | 5 mm |
| Height | 12.65 mm |
| Depth | 9.7 mm |
| Dimensional class | n/a |
| Wire section | - |
| Clamp opening size | - |
| Wire stripping | - |
| Operating temperature | -40 ÷ +130 °C |

ELECTRICAL CHARACTERISTICS

| | |
|--------------|-------------|
| Current | 24 A |
| Voltage | 250 V |
| Test Voltage | 4 kVrms/60s |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|---|
| Screw | - |
| Recommended torque | - |

APPROVALS DATA



| | | | |
|--------------|---|---|---------------------------|
| Current | - | - | UL 1059 |
| Voltage | - | - | 18 A factory / 15 A field |
| Wire section | - | - | 300 V |
| Torque | - | - | - |
| FILE | - | - | E178356 |

MATERIALS

| | |
|----------|---------------|
| Housing | PA - UL 94 V0 |
| Screw | - |
| Clamp | - |
| Terminal | - |

SCIP Number

e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

BK

On request

