
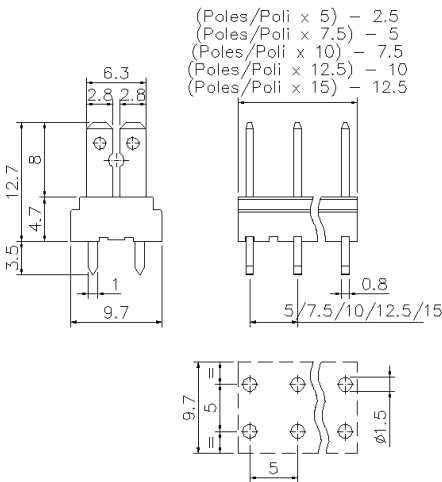


# PVSF\_\_-5-V-D38

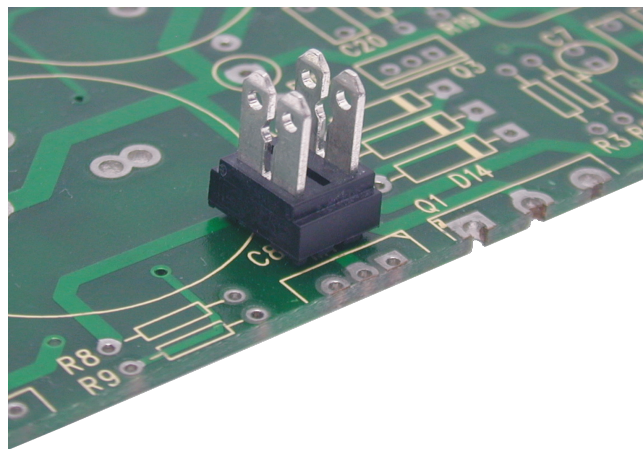

## GENERAL INFORMATION

pitch	5 mm
Height	-
Depth	-
Dimensional class	Alta
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	250 V
Test Voltage	4 kVrms/60s

## MECHANICAL CHARACTERISTICS

Screw	-
	-

## APPROVALS DATA



	-	-	-
	-	-	-
	-	-	-
	-	-	-
	-	-	-

## FILE

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

## COLOURS

Standard	On request
----------	------------



POLES

02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

NAME

PVSF02-5-V-D38  
PVSF03-5-V-D38  
PVSF04-5-V-D38  
PVSF05-5-V-D38  
PVSF06-5-V-D38  
PVSF07-5-V-D38  
PVSF08-5-V-D38  
PVSF09-5-V-D38  
PVSF10-5-V-D38  
PVSF11-5-V-D38  
PVSF12-5-V-D38  
PVSF13-5-V-D38  
PVSF14-5-V-D38  
PVSF15-5-V-D38  
PVSF16-5-V-D38  
PVSF17-5-V-D38  
PVSF18-5-V-D38  
PVSF19-5-V-D38  
PVSF20-5-V-D38  
PVSF21-5-V-D38  
PVSF22-5-V-D38  
PVSF23-5-V-D38  
PVSF24-5-V-D38

3D FILE

File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product  
File not available for this product