


SH__-5-M

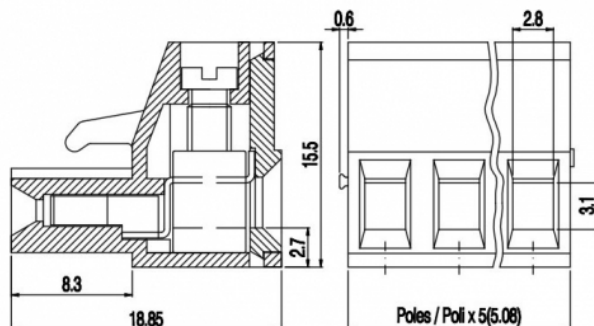

GENERAL INFORMATION

pitch	5 mm
Height	15.5 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



Current	EN 61984	16 A
Voltage		250 V
Wire section		2.5 mm ²
Torque		0.5 Nm
FILE	CA02.04178	

EN 61984	12 A
	250 V
	2.5 mm ²
	0.5 Nm
	40005779

UL 1059	12 A factory / 12 A field
	300 V
	14 ÷ 30 AWG
	4.5 Lb-in
	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

COLOURS

Standard

On request



POLES

02

03



NAME

SH02-5-M

SH03-5-M

3D FILE

File not available for this product

File not available for this product