


SH__-5

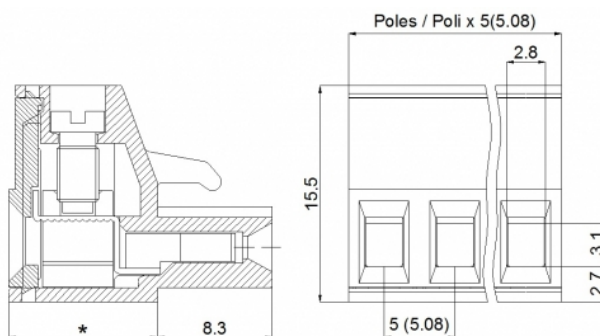

* = 10.55 for/per SH02+24-5,08
 * = 10.55 for/per SH02+15-5
 * = 10.9 for/per SH16+24-5

GENERAL INFORMATION

pitch	5 mm
Height	15.5 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14÷30 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	16 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	2.5 mm ²	2.5 mm ²	14÷30 ÷ 30 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

COLOURS

Standard



On request



POLES

02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

NAME

SH02-5
SH03-5
SH04-5
SH05-5
SH06-5
SH07-5
SH08-5
SH09-5
SH10-5
SH11-5
SH12-5
SH13-5
SH14-5
SH15-5
SH16-5
SH17-5
SH18-5
SH19-5
SH20-5
SH21-5
SH22-5
SH23-5
SH24-5

3D FILE

File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File not available for this product
File not available for this product
File not available for this product
File available
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product