
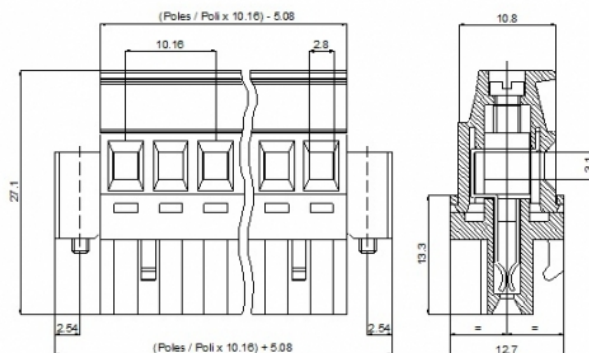


SV__-10,16-F-K

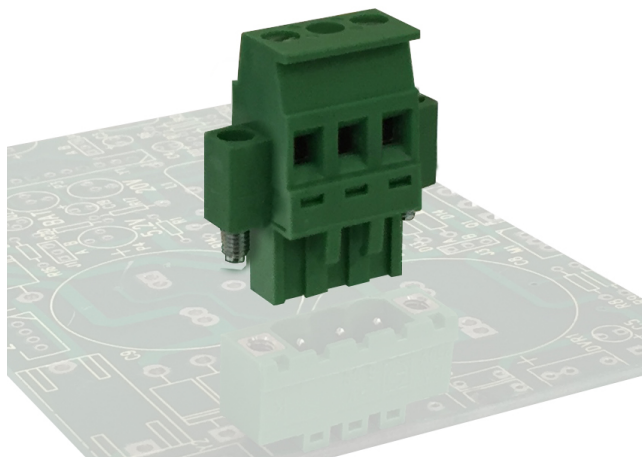

Flange screw IAS
Flangia a vite IAS

GENERAL INFORMATION

pitch	10,16 mm
Height	27.6 mm
Depth	13.5 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 61984	16 A
Current	16 A
Voltage	500 V
Wire section	2.5 mm ²
Torque	0.5 Nm
FILE	CA02.04178



EN 61984	15 A
Current	15 A
Voltage	500 V
Wire section	2.5 mm ²
Torque	0.5 Nm
FILE	40005779



UL 1059	12 A factory / 12 A field
Current	12 A factory / 12 A field
Voltage	600 V
Wire section	14 AWG
Torque	4.5 Lb-in
FILE	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	269cc4c7-8d06-4994-abfa-5163d2b356bd

COLOURS

Standard

On request



POLES

02
03
04
05
06
07
08
09
10
11

NAME

SV02-10,16-F-K
SV03-10,16-F-K
SV04-10,16-F-K
SV05-10,16-F-K
SV06-10,16-F-K
SV07-10,16-F-K
SV08-10,16-F-K
SV09-10,16-F-K
SV10-10,16-F-K
SV11-10,16-F-K

3D FILE

File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product