


ZRSL

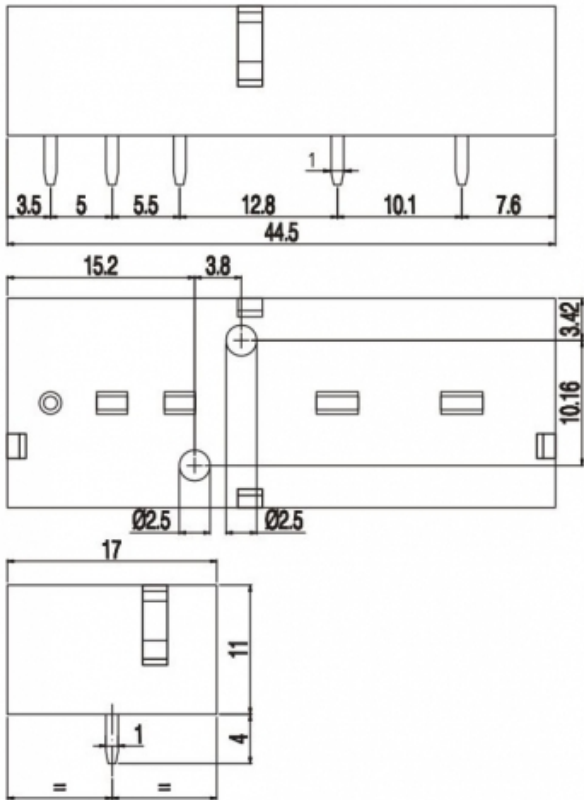

GENERAL INFORMATION

| | |
|-----------------------|--------------|
| pitch | - |
| Height | 11 mm |
| Depth | 17 mm |
| Dimensional class | n/a |
| Wire section | - |
| Clamp opening size | - |
| Wire stripping | - |
| Operating temperature | -30 ÷ +70 °C |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------|-------|
| Current | 5 A |
| Voltage | 250 V |
| impulse voltage | 2 kV |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|---|
| Screw | - |
| Recommended torque | - |

APPROVALS DATA



| | | | |
|---------|---|---|---|
| Current | - | - | - |
| Voltage | - | - | - |

| | | | |
|------------------|---|------------|-------------------------|
| Wire section | - | - | - |
| Torque | - | - | - |
| FILE | - | - | - |
| MATERIALS | | | |
| Housing | | | - |
| Screw | | | - |
| Clamp | | | - |
| Terminal | | | Tin-plated copper alloy |
| COLOURS | | | |
| Standard | | On request | |

